














Specifications (Series luminaires)




	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
Φ	Power factor (Cos fi)	Hasta >0,55
	Dimming	No
	Bushing type	G24D-3 (Rotatorio)
	IP Tightness index	IP20
K	Colour temperature	3.000K/4.000K
	CRI Colour rendering index	>80
	Opening angle	140°
	Measures	38x113mm
	Operating temperature	-5°C~+35 °C
Φ_{LUM}	Flux (lm)	1.055lm
	Lifetime	(L70B50>) 25.000h
	CEE Energy classification	E

References



	W	ϕ	ϕ_{LUM}	K	\leftrightarrow
562768	10W	>0,55	1.023lm	3.000K	38x113mm
562775	10W	>0,55	1.055lm	4.000K	38x113mm

Dimensions

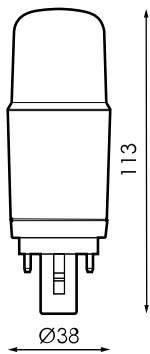

Photometry

