














Specifications (Series luminaires)


	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
Φ	Power factor (Cos fi)	Hasta >0,5
	Dimming	No
	Bushing type	E27
	IP Tightness index	IP20
K	Colour temperature	3.000K/5.000K
	CRI Colour rendering index	>80
	Opening angle	120°
	Measures	90x116mm
	Operating temperature	-5°C~+35 °C
Φ_{LUM}	Flux (lm)	1.055lm
	Lifetime	(L70B50>) 40.000h
	CEE Energy classification	F

References



	W	ϕ	ϕ_{LUM}	K	\leftrightarrow
476706	8W	>0,5	681lm	3.000K	90x116mm
476713	8W	>0,5	752lm	5.000K	90x116mm
476720	12W	>0,5	1.055lm	3.000K	90x116mm
476737	12W	>0,5	1.145lm	5.000K	90x116mm

Dimensions

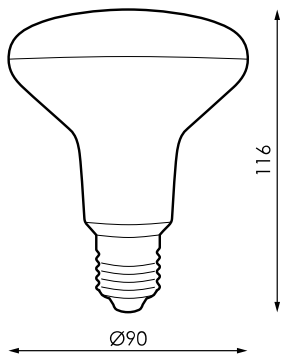

Photometry

