



## Applications



Offices



Classrooms



Retail



Home



Large surfaces



Hotels



Restaurants












Health care







## Certifications



## Specifications (Series luminaires)




	<b>Voltage (V)</b>	230V
Hz	<b>Frecuency (Hz)</b>	50-60Hz
	<b>Dimming</b>	No
	<b>IP Tightness index</b>	IP20
	<b>IP installed Sealing rating</b>	40
	<b>Body color</b>	White
	<b>Diffuser Material</b>	PMMA-O
	<b>Body</b>	FE
K	<b>Colour temperature</b>	3.000K/3.000K
	<b>CRI Colour rendering index</b>	≥80
	<b>Opening angle</b>	120°

	<b>Measures</b>	600x600x7,5mm
	<b>Mounting position</b>	Empotrado Techo
	<b>Operating temperature</b>	-5 +35
	<b>Flux (lm)</b>	3898lm
	<b>Electrical isolation</b>	CII
	<b>Lifetime</b>	L70 >50.000h





Prilux guarantees a ± 10% tolerance in light flux measurements.
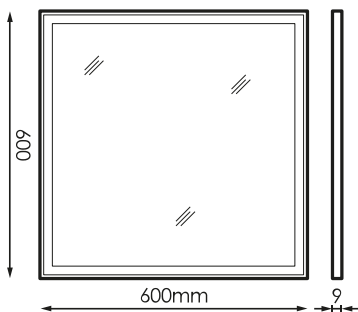
## Dimensions




## References



	$W_{LED}$	W		$\phi_{LED}$	$\phi_{LUM}$	K		
<b>404471</b>	40W	43W	1000mA	4813lm	3898lm	4.000K	575x575	No
<b>404488</b>	40W	43W	1000mA	5035lm	4059lm	6500k	575x575	No
<b>404693</b>	40W	43W	1000mA	4583lm	3664lm	3.000K	575x575	No

## Photometry

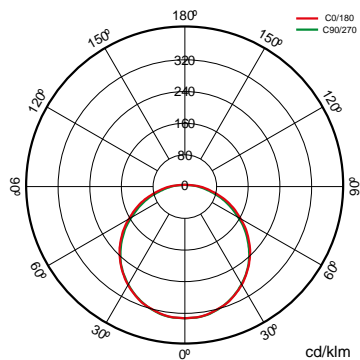

## On request



Emergency kit 1h



Dali

Bluetooth

## Accessories



**964562**

FRAME WH  
RECESSED PLASTER  
SILENT LED 60X60CM



**164092**

WH SURFACE  
DRAWER SILENT  
LED 60X60CM



**397391**

RECESSED CEILING  
FRAME HIDDEN  
PROFILE SILENT I  
60X60



## Solutions

S



### CTE Pack

#### description



Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.



### CLASSROOMS Pack

#### description



Regulation by contribution of natural light and stand alone presence. Lighting control system to meet CTE requirements and optimize energy use by taking advantage of natural light and automatic shutdown in case of absence.

#### Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web [www.prilux.es](http://www.prilux.es)