






















Specifications (Series luminaires)




	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
	Dimming	No
	IP Tightness index	IP40
	Body color	Grey
	Diffuser Material	PC-O
	Body	AL
K	Colour temperature	3.000K/4.000K
	CRI Colour rendering index	>80
	Opening angle	125°
	Measures	Ø290x70mm
	Mounting position	Superficie
	Operating temperature	-10°C~+45 °C
	Flux (lm)	2.854lm
	Lifetime	(L70B50>) 25.000h

References

	W		ϕ_{LUM}	K				
388849	30W	140mA	2.854lm	3.000K	>80	White	Ø290x70mm	No
388856	30W	140mA	2.992lm	4.000K	>80	White	Ø290x70mm	No
388863	30W	140mA	2.854lm	3.000K	>80	Gray	Ø290x70mm	No
402019	20W	80mA	1.905lm	3.000K	>80	White	Ø290x70mm	No
402026	20W	80mA	1.991lm	4.000K	>80	White	Ø290x70mm	No
402033	20W	80mA	1.905lm	3.000K	>80	Gray	Ø290x70mm	No
402040	20W	80mA	1.991lm	4.000K	>80	Gray	Ø290x70mm	No

Dimensions

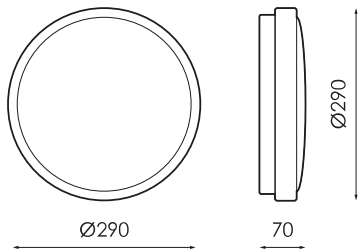

Photometry

Info

Until end of stock