




Specifications (Series luminaires)			≡
⏚	Electrical isolation	CI	
⚡	Voltage (V)	230V	
Hz	Frecuency (Hz)	50/60Hz	
⦶	Power factor (Cos fi)	Hasta ≥0,5	
⦿	Dimming	No	
🔌	Bushing type	E14	
🔧	IP Tightness index	IP20	
🔍	Body color	Transparent	
📏	Diffuser Material	VT	
K	Colour temperature	2700K-2700K	
🌿	CRI Colour rendering index	>80	
📐	Opening angle	360°	
↕	Measures	35x35x123mm	
🌡️	Operating temperature	-	
⦶ _{LUM}	Flux (lm)	max. 403lm	
⏳	Lifetime	(L70B50>)20.000h	
🕒	Lifetime	(L70B50>)20.000h	
📦	CEE Energy classification	A++	

References					
	W	φ	Φ _{LUM}	K	↕
237376	4W	≥0,5	403lm	2700K 2700K	35x35x123mm

Dimensions	↕	Photometry	
------------	---	------------	---

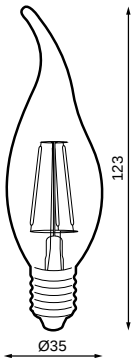

Info

Hasta fin de existencias