




Specifications (Series luminaires)			☰
⚡	Electrical isolation	CI	
⚡	Voltage (V)	230V	
Hz	Frecuency (Hz)	50/60Hz	
⊘	Power factor (Cos fi)	Hasta ≥0,5	
⦿	Dimming	No	
🔌	Bushing type	E14	
🔧	IP Tightness index	IP20	
🔍	Body color	Transparent	
📄	Diffuser Material	VT	
K	Colour temperature	2700K-2700K	
🌿	CRI Colour rendering index	>80	
📐	Opening angle	360°	
↕	Measures	35x35x97mm	
🌡️	Operating temperature	-	
⊘ _{LUM}	Flux (lm)	max. 403lm	
🕒	Lifetime	(L70B50>)20.000h	
🕒	Lifetime	(L70B50>)20.000h	
🏠	CEE Energy classification	A++	

References

	W	ϕ	ϕ_{LUM}	K	
237345	2,5W	$\geq 0,5$	267lm	2700K	35x35x97mm
				2700K	
237352	4W	$\geq 0,5$	403lm	2700K	35x35x97mm
				2700K	

Dimensions

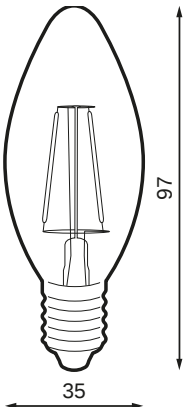

Photometry



Info



Hasta fin de existencias