


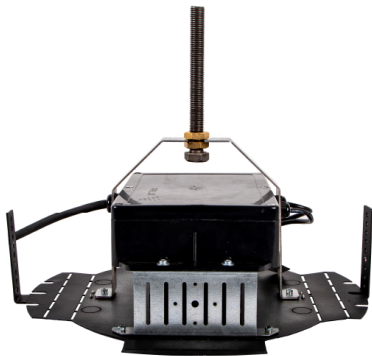


Specifications (Series luminaires)			
	Voltage (V)	220-240V	
Hz	Frecuency (Hz)	50/60Hz	
	Current (A)	max.1000mA	
ϕ	Power factor (Cos fi)	Hasta 0,98	
	LED number	12/12	
	Dimming	8N DA CMR	
K	Colour temperature	4000K-4000K	
	CRI Colour rendering index	>70	
	Optical	VA00L1P	
	Higher Hemispheric Flow	0,0%	
	Measures	408x408x175mm	
	Weight	0,004Kg	
	Operating temperature	-40°C ~ +50°C	
ϕ_{LUM}	Flux (lm)	max. 4731lm	
	Electrical isolation	CI	
	Lifetime	L90B10>200.000H L95B10>100.000H	
ϕ/W	Efficacy	140lm/W	

References

	W_{LED}	W		ϕ	ϕ_{LED}	ϕ_{LUM}	ϕ/W		K
634816	12W	13,3W	350mA	2399lm	2170lm	1910lm	144lm/W	12	4000K
634823	18W	18,8W	500mA	3310lm	2985lm	2627lm	140lm/W	12	4000K
634830	24W	26,5W	700mA	4437lm	3995lm	3516lm	133lm/W	12	4000K
634854	36W	38,8W	1000mA	5965lm	5376lm	4731lm	122lm/W	12	4000K

Dimensions

Photometry



Solutions

S



Cora
Manager

description

Lighting management in the electrical panel that allows group control of the luminaires connected to the control center via the power line (CMR) without additional wiring

Info 

For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es