














Specifications (Series luminaires)




	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
Φ	Power factor (Cos fi)	Hasta >0,7
	Dimming	Yes
	Bushing type	E27
	IP Tightness index	IP20
K	Colour temperature	2.500K/2.500K
	CRI Colour rendering index	>80
	Opening angle	280°
	Measures	64x141mm
	Operating temperature	-5°C~+35 °C
Φ_{LUM}	Flux (lm)	760lm
	Lifetime	(L70B50>) 15.000h
	CEE Energy classification	F

References

	W	ϕ	ϕ_{LUM}	K	\leftrightarrow
402170	4,5W	>0,7	458lm	2.500K	58x134mm
402187	7,5W	>0,7	760lm	2.500K	64x141mm

Dimensions

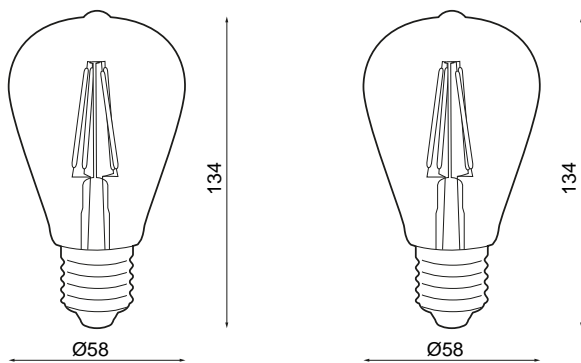

Photometry