


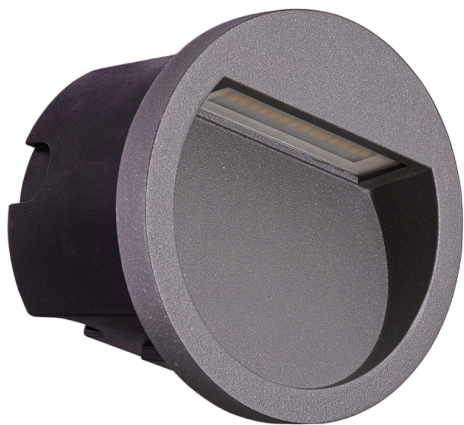


Specifications (Series luminaires)			
	Electrical isolation	CI	
	Voltage (V)	100-240V	
Hz	Frecuency (Hz)	50-60Hz	
	Dimming	No	
	IP Tightness index	IP54	
	Diffuser Material	VT-T	
	Body	AL	
K	Colour temperature	3.000K/4.000K	
	CRI Colour rendering index	≥80	
	Opening angle	80°	
	Measures	Ø105x71mm	
	Mounting position	Empotrado Pared	
	Operating temperature	-10 +35	
	Flux (lm)	82lm	
	Lifetime	(L70B50>) 30.000h	

References

	W	ϕ_{LUM}	K				
495301	3W	77lm	3.000K	≥ 80	(L70B50>) 30.000h	80°	Ø105x71mm
495318	3W	82lm	4.000K	≥ 80	(L70B50>) 30.000h	80°	Ø105x71mm

Dimensions

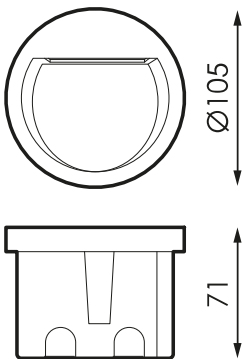

Photometry

