















## Specifications (Series luminaires)


	<b>Electrical isolation</b>	CI
	<b>Voltage (V)</b>	230V
<b>Hz</b>	<b>Frecuency (Hz)</b>	50-60Hz
	<b>IP Tightness index</b>	IP65
	<b>Body color</b>	Canvas grey
	<b>Diffuser Material</b>	PC-P
	<b>Body</b>	AL
<b>K</b>	<b>Colour temperature</b>	3.000K/5.000K
	<b>CRI Colour rendering index</b>	>80
	<b>Opening angle</b>	100°
	<b>Measures</b>	298x220x39mm
	<b>Operating temperature</b>	-5°C~+35 °C
	<b>Flux (lm)</b>	4.318lm
	<b>Lifetime</b>	(L70B50>) 25.000h

## References




	W	$\phi_{LUM}$	K		
<b>534550</b>	10W	976lm	3.000K	Canvas gray	138x117x27mm
<b>534574</b>	20W	1.438lm	3.000K	Canvas gray	158x134x28mm
<b>534581</b>	20W	1.576lm	5.000K	Canvas gray	158x134x28mm
<b>534611</b>	50W	4.318lm	3.000K	Canvas gray	298x220x39mm

## Dimensions

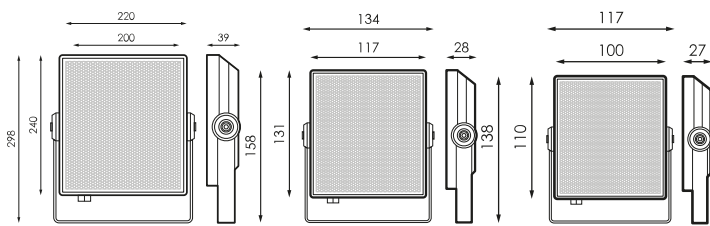

## Photometry

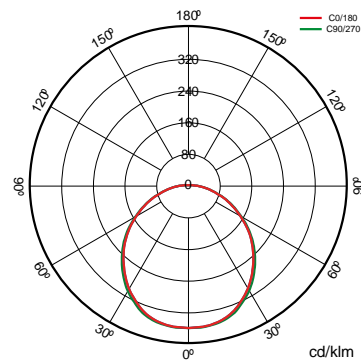

## Info



Until end of stock