















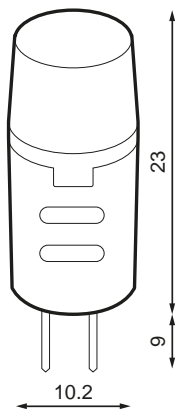
Specifications (Series luminaires)

	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
	Dimming	No
	Bushing type	G9
	IP Tightness index	IP20
K	Colour temperature	3.000K-5.000K
	CRI Colour rendering index	>80
	Opening angle	240°
	Measures	7x5x60mm
	Operating temperature	-5°C~+35 °C
	Flux (lm)	353lm
	Lifetime	(L70B50>) 25.000h
	CEE Energy classification	F

References

	W	ϕ_{LUM}	K	\leftrightarrow
482622	4W	353lm	3.000K	7x5x60mm
482639	4W	367lm	5.000K	7x5x60mm

Dimensions



Photometry