


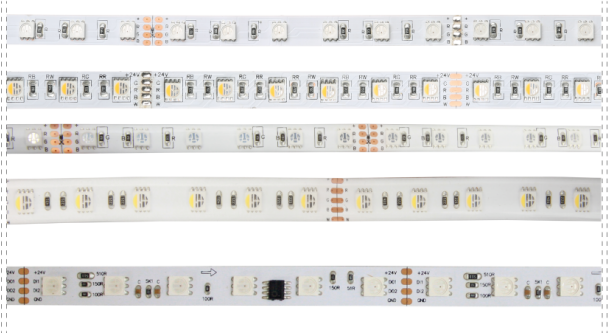

Specifications (Series luminaires)			
	Electrical isolation	CIII	
	Voltage (V)	24V dcV	
	Frecuency (Hz)	50-60Hz	
	Colour temperature	RGB/RGB	
	Opening angle	120°	
	Measures	5.000x10mm	
	Strip cutting unit	100mm	
	Lifetime	(L70B50>) 50.000h	


Info 

>10m less performance (7,2W/m-14,4W/m). >5m less performance (19,2W/m). The life time of our LED strips is 50,000h as long as the ambient temperature does not exceed 25 °C. To ensure the life of the LED for our strips ≥ 9.6W, it is mandatory to place it on a surface that dissipates the heat they generate.

References

	W	K		
471336	7,2W	RGB	165mm	5.000x10mm
471343	14,4W	RGB	100mm	5.000x10mm
471367	7,2W	RGB	165mm	5.000x10mm
471374	14,4W	RGB	100mm	5.000x10mm
471381	19,2W	RGBW	100mm	5.000x12mm
471404	14,4W	RGB	100mm	5.000x10mm

Dimensions

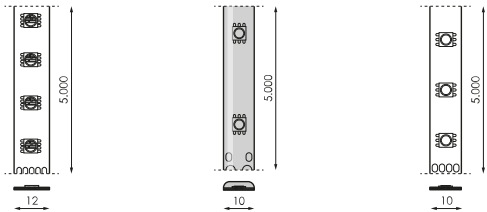

On request



Accessories



472418
IMAGINE RGB RF
CONTROLLER 5-24V
3X4A



472449
IMAGINE RGB
AMPLIFIER 5-24V
3X4A



473682
POWER SUPPLY
60W 24V IP67
LPV-60-24



473699
POWER SUPPLY
100W 24V IP67
LPV-100-24




473705
POWER SUPPLY
150W 24V IP67
LPV-150-24



473101
CONNECTOR
IMAGINE RGB IP65
CABLE-STRIP




473125
CONNECTOR
IMAGINE RGB IP65
STRIP-STRIP



209182
STRIP CONNECTOR X
IP20 5050 RGB 10MM
4P

Accessories



209175

T-STRIP CONNECTOR
IP20 5050 RGB 10MM
4P



501453

POWER SUPPLY
XLG-200-24-A IP67

Info

i

Quick connector. Fastening clip. Serial connection: 18W: 32luminaires 37W: 20luminaires 57W: 13luminaires