




Specifications (Series luminaires)		
	Electrical isolation	CIII
	Voltage (V)	24V
	IP Tightness index	IP65
	Colour temperature	3000K-6500K
	CRI Colour rendering index	>80
	Measures	5.000x10x0mm
	Operating temperature	-
	Flux (lm)	max. 1568lm
	Lifetime	(L70B50>)50.000h
	Lifetime	(L70B50>)50.000h

References



	W	K		
471084	4,8W	2700K	80	5.000x10x0mm
		2700K		
471107	4,8W	5000K	80	5.000x10x0mm
		5000K		
471114	4,8W	6500K	80	5.000x10x0mm
		6500K		
471121	4,8W	Rojo	Rojo	5.000x10x0mm
		Rojo		
471138	4,8W	Verde	Verde	5.000x10x0mm
		Verde		
471145	4,8W	Azul	Azul	5.000x10x0mm
		Azul		
471152	4,8W	Ámbar	Ámbar	5.000x10x0mm
		Ámbar		
471237	14,4W	6500K	80	5.000x10x0mm
		6500K		
471374	14,4W	RGB	RGB	5.000x10x0mm
		RGB		
502740	14,4W	5000K	80	30x10x5mm
		5000K		
502764	14,4W	RGB	RGB	30x10x5mm
		RGB		
568715	4,8W	2700K	80	5.000x10x0mm
		2700K		
568722	4,8W	4000K	80	5.000x10x0mm
		4000K		
568739	4,8W	5000K	80	5.000x10x0mm
		5000K		
568746	4,8W	6500K	80	5.000x10x0mm
		6500K		
568753	9,6W	2700K	80	5.000x10x6mm
		2700K		
568999	9,6W	4000K	80	5.000x10x0mm
		4000K		
569019	9,6W	5000K	80	5.000x10x0mm
		5000K		
569026	9,6W	6500K	80	5.000x10x0mm
		6500K		
569033	14,4W	2700K	80	5.000x10x5mm
		2700K		
569040	14,4W	4000K	80	5.000x10x0mm
		4000K		
569057	14,4W	5000K	80	5.000x10x0mm
		5000K		
569064	14,4W	6500K	80	5.000x10x0mm
569088	14,4W	3000K	80	5.000x10x0mm

Dimensions

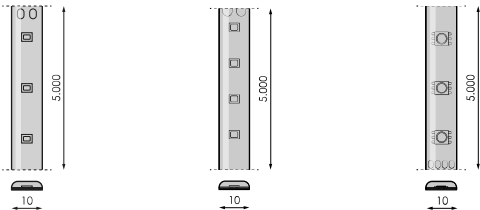

On request



Ima 24v Ip65 4.8w



Accessories

