Ircana M

PRILUX



IRCANA M TA



IRCANA M TC
(con cono)



IRCANA M TF
(con florón)



IRCANA M SP
(suspendida superior)

Specifications (Series luminaires)

Voltage (V)	V
Frecuency (Hz)	50/60Hz
Current (A)	max.1000mA
Power factor (Cos fi)	Hasta 0,98
LED number	32/32
Dimming	8N DA CMR

IP Tightness index	IP66
IK Impact resistance	IK10
Body color	9005T
Diffuser Material	VT-T 6MM
Body	AL IAP

Colour temperature	3000K-4000K
CRI Colour rendering index	>70
Optical	VA00K0M
Higher Hemispheric Flow	0,0

Measures	400x400x534mm
Wind Resistance	0,12m2

Operating temperature	-40°C ~ +35°C

Flux (lm)	max. 11655lm

Electrical isolation	CI

Lifetime	L90B10>200.000H
Efficacy	lm/W

Ircana M


PRILUX


References

	W_{LED}	W		Φ	Φ_{LED}	Φ_{LUM}		K
716932	96W	100,9W	1000mA	15907lm	14552lm	11655lm	32	4000K
719766	32W	34,3W	350mA	6112lm	5578lm	4467lm	32	3000K
719773	32W	34,3W	350mA	6397lm	5838lm	4676lm	32	4000K
719780	48W	49,2W	500mA	8435lm	7701lm	6168lm	32	3000K
719797	48W	49,2W	500mA	8827lm	8059lm	6454lm	32	4000K
719803	64W	68,7W	700mA	11304lm	10336lm	8278lm	32	3000K
719810	64W	68,7W	700mA	11832lm	10819lm	8665lm	32	4000K
719827	96W	100,9W	1000mA	15200lm	13906lm	11137lm	32	3000K

Dimensions

Photometry

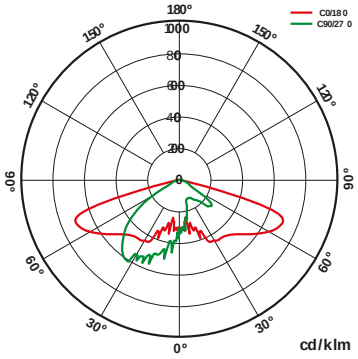



659550

KIT ADAP. A POSTE
Ø76MM IRCANA S/M
RAL9005T

Technologies

Overstorm

OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.

SystemShield

SYSTEMSHIELD technology is designed to guarantee the hours of useful life of luminaires installed in environments where exceeding the maximum operating temperature is possible and even probable. Using thermal probes, the luminaire knows its operating temperature at all times.

CMR

CMR (CORA MANAGER READY) identifies the prilux luminaires compatible with the CORA MANAGER system that provides the luminaires with control, regulation and programming.

PRILUX

Solutions

S

Cora Manager

description

One of the key pieces to achieve the pathtowards smart cities is lighting. Lighting management systems are advancing by leapsand bounds, prioritizing primary objectives such as service quality, cost reduction and care for the environment. CORA Manager is the control system developedby Prilux that, together with our compatible luminaires that provides intelligent management of public lighting, maintaining harmony between sustainable development and quality of life forcitizens, while promoting safety and saving.

UNIO Smart

description

UNIO Smart Cities. Optimized management and control of lighting in modern cities. UNIO is the Prilux telemanagement platform that makes it easier to make optimal decisions in real time, thanks to obtaining a diagnosis generated after collecting data from the remote point-to□point luminaire system.

Info

For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es