


















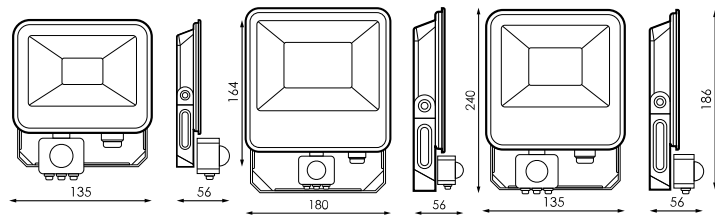
Specifications (Series luminaires)

	Electrical isolation	CI
	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
	Power factor (Cos fi)	Hasta >0,9
	IP Tightness index	IP65
	Body color	7045
	Diffuser Material	VT-O
	Body	AL
K	Colour temperature	5.000K/5.000K
	CRI Colour rendering index	>80
	Opening angle	110°
	Measures	164x135x56mm
	Flux (lm)	1.923lm
	Lifetime	(L70B50>) 25.000h

References

	W	ϕ_{LUM}	K		
504768	20W	1.923lm	5.000K	Dark gray	164x135x56mm
504775	30W	2.743lm	5.000K	Dark gray	186x135x56mm
504782	50W	4.516lm	5.000K	Dark gray	240x180x56mm

Dimensions



Photometry