


















Specifications (Series luminaires)

	Electrical isolation	CI
	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
	Power factor (Cos fi)	Hasta >0,5
	IP Tightness index	IP65
	Body color	7045
	Diffuser Material	VT-O
	Body	AL
K	Colour temperature	3.000K/5.000K
	CRI Colour rendering index	>80
	Opening angle	110°
	Measures	186x135x30mm
	Flux (lm)	2.743lm
	Lifetime	(L70B50>) 25.000h

References

	W	ϕ_{LUM}	K		
504638	10W	911lm	3.000K	Dark gray	109x90x27mm
504645	10W	987lm	5.000K	Dark gray	109x90x27mm
504652	20W	1.823lm	3.000K	Dark gray	165x135x30mm
504669	20W	1.923lm	5.000K	Dark gray	165x135x30mm
504676	30W	2.618lm	3.000K	Dark gray	186x135x30mm
504683	30W	2.743lm	5.000K	Dark gray	186x135x30mm
504690	50W	4.371lm	3.000K	Dark gray	240x180x30mm
504706	50W	4.516lm	5.000K	Dark gray	240x180x30mm
504713	70W	6.203lm	3.000K	Dark gray	287x243x37mm
504720	70W	6.318lm	5.000K	Dark gray	287x243x37mm
504737	100W	8.711lm	3.000K	Dark gray	313x243x37mm
504744	100W	8839lm	5.000K	Dark gray	313x243x37mm
522533	30W	2.743lm	5.000K	White	186x135x30mm
522540	50W	4.516lm	5.000K	White	240x180x30mm

Dimensions

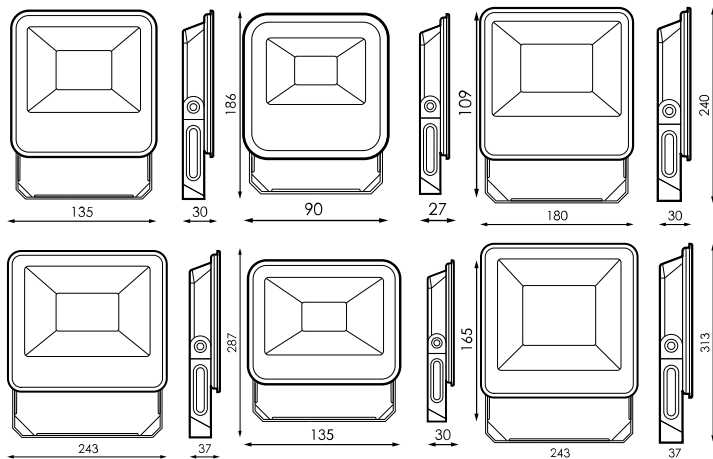

Photometry

