



## Specifications (Series luminaires)



⊕	<b>Electrical isolation</b>	CII
⚡	<b>Voltage (V)</b>	180V
Hz	<b>Frequency (Hz)</b>	50-60Hz
∅	<b>Power factor (Cos fi)</b>	Hasta $\geq 0,9$
⊖	<b>Dimming</b>	No

○○	<b>IP Tightness index</b>	IP20
○○	<b>IP installed Sealing rating</b>	IP40
○○	<b>Body color</b>	White
▨	<b>Diffuser Material</b>	PC-O
▨	<b>Body</b>	PC

K	<b>Colour temperature</b>	4000K-4000K
ℳ	<b>CRI Colour rendering index</b>	>80
Δ	<b>Opening angle</b>	120°

↔	<b>Measures</b>	125x125x30mm
←	<b>Mounting position</b>	Empotrado Techo

tc	<b>Operating temperature</b>	-
----	------------------------------	---

∅ <sub>LUM</sub>	<b>Flux (lm)</b>	max. 563lm
------------------	------------------	------------

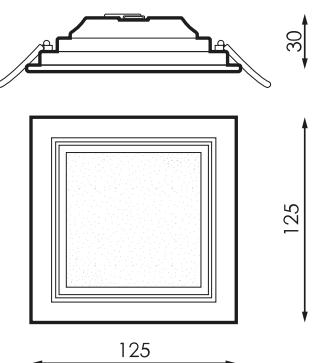
☒	<b>Lifetime</b>	(L70B50>)50.000h
---	-----------------	------------------

**References**

---

	W	$\phi_{\text{LUM}}$	K				
<b>387422</b>	6W	563lm	4000K	>80	White	125x125x30mm	No

---

**Dimensions****Photometry**



## Solutions

S



### CTE Pack

#### description



Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.



### BLUETOOTH Pack

#### description



Device that enables DALI luminaire control through any Bluetooth® terminal via free APP that offers us control of flow regulation, color, scene configuration, behavior linked to schedules.



### You need

#### description



Need DALI driver



### You need

#### description



#### Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web [www.prilux.es](http://www.prilux.es)