




---

## Applications

---



Fairgrounds



Facades


















Historic buildings



Cultural spaces


## Specifications (Series luminaires)



 <b>Voltage (V)</b>	220-240V	 <b>Measures</b>	960x102x88mm
<b>Hz Frecuency (Hz)</b>	50-60HzHz	 <b>Operating temperature</b>	-20°C a +35°C
 <b>LED number</b>	18/18	 <b>Surges protection</b>	No
 <b>Dimming</b>	No	 <b>Flux (lm)</b>	3.319lm
 <b>IP Tightness index</b>	IP66	 <b>Electrical isolation</b>	CI
 <b>IK Impact resistance</b>	IK09	 <b>Lifetime</b>	L70>50.000h
 <b>Body color</b>	9007		
 <b>Diffuser Material</b>	VT		
 <b>Body</b>	AL		
<b>K Colour temperature</b>	4000k-4000k		
 <b>CRI Colour rendering index</b>	>80		

Prilux guarantees a  $\pm 10\%$  tolerance in light flux measurements.

## Dimensions

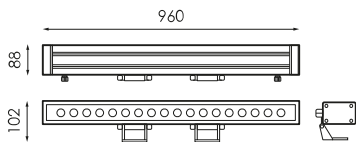

## References



	$W_{LED}$	W	$\phi_{LED}$	$\phi_{LUM}$		
<b>410137</b>	37W	40W	2803lm	2.273lm	18	No
<b>410144</b>	37W	40W	2954lm	2.387lm	18	No
<b>591812</b>	42W	45W	3.924lm	3.319lm	18	No
<b>591829</b>	42W	45W	4.017lm	3.485lm	18	No

## Photometry

