



---

## Applications

---



Historic buildings



Cultural spaces



















Facades




Fairgrounds

## Specifications (Series luminaires)

 <b>Voltage (V)</b>	24 dcV	 <b>Measures</b>	1.000x50x105mm
 <b>Dimming</b>	DMX	 <b>Weight</b>	0.0028Kg
 <b>IP Tightness index</b>	IP66	 <b>Operating temperature</b>	-30°C ~ +50°C
 <b>IK Impact resistance</b>	IK08	 <b>Surges protection</b>	No
 <b>Body color</b>	9007	 <b>Flux (lm)</b>	max. 2885lm
 <b>Diffuser Material</b>	PC	 <b>Electrical isolation</b>	CIII
 <b>Body</b>	AL	 <b>Lifetime</b>	(L70B50>)50.000h
<b>K Colour temperature</b>	RGBW(W:3000)- RGBW(W:3000)		
 <b>CRI Colour rendering index</b>	>RGBW(W:3000)		
 <b>Higher Hemispheric Flow</b>	max. 2885lm		



Prilux guarantees a  $\pm 10\%$  tolerance in light flux measurements.
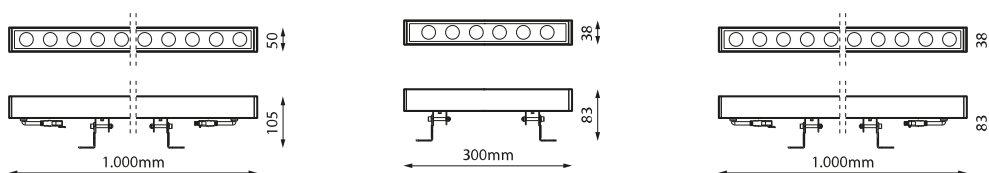
## Dimensions



## References



	W	$\phi_{LUM}$	$\phi/W$	
<b>693875</b>	7W	280lm	40lm/W	Yes
<b>693868</b>	24W	965lm	40lm/W	Yes
<b>693882</b>	72W	2885lm	40lm/W	Yes

## Accessories



**485135**

MASTER DMX 512 1  
UNIVERSE



**481687**

POWER SUPPLY  
150W 24V IP66 PLUG/  
IP44



**488457**

FUENTE DE  
ALIMENTACION 60W  
24V IP66 CONECTOR



**488464**

POWER SUPPLY  
100W 24V IP66 PLUG/  
IP44



**529037**

MASTER DMX 512 2  
UNIVERSOS



**571968**

FUENTE DE  
ALIMENTACION  
200W 24V IP67



**662932**

ADAPT. 15CM NEGRO  
CONEC.SMART LINK  
A HEMBRA RÁPIDO



**701600**

BLOQUE CONEXION  
T 5P CON  
ADAPTADOR