




Specifications (Series luminaires)		
	Electrical isolation	CII
	Voltage (V)	230V
	Frecuency (Hz)	50-60Hz
	Power factor (Cos fi)	Hasta ≥0,9
	Dimming	No
	IP Tightness index	IP20
	IK Impact resistance	IK08
	Body color	White
	Diffuser Material	PC-O
	Body	PC
	Colour temperature	3000K-4000K
	CRI Colour rendering index	>80
	Opening angle	100°
	Measures	160x160x62mm
	Operating temperature	-
	Flux (lm)	max. 942lm
	Lifetime	(L70B50>)50.000h


References

	W	ϕ_{LUM}	K					
483346	12W	867lm	3000K	Gray	>80	(L70B50>)50.000h	100°	160x160x62mm
483353	12W	942lm	4000K	Gray	>80	(L70B50>)50.000h	100°	160x160x62mm
483360	12W	867lm	3000K	White	>80	(L70B50>)50.000h	100°	160x160x62mm
483377	12W	942lm	4000K	White	>80	(L70B50>)50.000h	100°	160x160x62mm
483384	12W	867lm	3000K	Black	>80	(L70B50>)50.000h	100°	160x160x62mm
483391	12W	942lm	4000K	Black	>80	(L70B50>)50.000h	100°	160x160x62mm

Dimensions

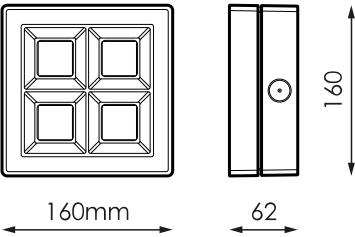

Photometry

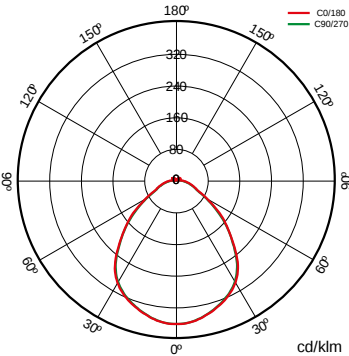

Info



Apertura magnética sin necesidad de herramientas.