


















Specifications (Series luminaires)



	Electrical isolation	CII
	Voltage (V)	220-240V
	Frecuency (Hz)	50-60Hz
	Power factor (Cos fi)	Hasta >0,5
	Dimming	No
	IP Tightness index	IP54
	Diffuser Material	PC-O
	Body	ABS
	Colour temperature	3.000K/4.000K
	CRI Colour rendering index	>80
	Opening angle	120°
	Measures	Ø170x57mm
	Mounting position	Superficie
	Flux (lm)	603lm
	Lifetime	(L70B50>) 25.000h




References



		W	ϕ_{LUM}	K			Δ	
468633	S	8W	603lm	4.000K	>80	(L70B50>) 25.000h	120°	Ø170x57mm
468664	S	8W	586lm	3.000K	>80	(L70B50>) 25.000h	120°	Ø170x57mm
468671	S	8W	603lm	4.000K	>80	(L70B50>) 25.000h	120°	Ø170x57mm
468688	S	8W	586lm	3.000K	>80	(L70B50>) 25.000h	120°	Ø170x57mm
468695	S	8W	603lm	4.000K	>80	(L70B50>) 25.000h	120°	Ø170x57mm
468701	S	8W	586lm	3.000K	>80	(L70B50>) 25.000h	120°	Ø170x57mm
468718	L	15W	1.217lm	4.000K	>80	(L70B50>) 25.000h	120°	Ø260x84mm
468725	L	15W	1.087lm	3.000K	>80	(L70B50>) 25.000h	120°	Ø260x84mm
468732	L	15W	1.217lm	4.000K	>80	(L70B50>) 25.000h	120°	Ø260x84mm
468749	L	15W	1.087lm	3.000K	>80	(L70B50>) 25.000h	120°	Ø260x84mm
468756	L	15W	1.217lm	4.000K	>80	(L70B50>) 25.000h	120°	Ø260x84mm
468763	L	15W	1.087lm	3.000K	>80	(L70B50>) 25.000h	120°	Ø260x84mm

Dimensions

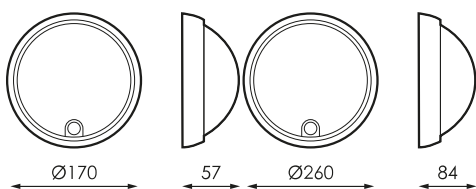

Photometry

