
















Specifications (Series luminaires)



	Electrical isolation	CII
	Voltage (V)	220-240V
	Frecuency (Hz)	50-60Hz
	Power factor (Cos fi)	Hasta >0,5
	Dimming	No

	IP Tightness index	IP54
	Diffuser Material	PC-O
	Body	ABS

	Colour temperature	3.000K/4.000K
	CRI Colour rendering index	>80
	Opening angle	120°

	Measures	Ø260x84mm
	Mounting position	Superficie

	Flux (lm)	1.087lm
---	------------------	---------

	Lifetime	(L70B50>) 25.000h
---	-----------------	-------------------




References



		W	ϕ_{LUM}	K			Δ	
468510	S	8W	603lm	4.000K	>80	(L70B50>) 25.000h	120°	Ø170x57mm
468527	S	8W	586lm	3.000K	>80	(L70B50>) 25.000h	120°	Ø170x57mm
468534	S	8W	603lm	4.000K	>80	(L70B50>) 25.000h	120°	Ø170x57mm
468541	S	8W	586lm	3.000K	>80	(L70B50>) 25.000h	120°	Ø170x57mm
468558	S	8W	603lm	4.000K	>80	(L70B50>) 25.000h	120°	Ø170x57mm
468565	S	8W	586lm	3.000K	>80	(L70B50>) 25.000h	120°	Ø170x57mm
468572	L	15W	1.217lm	4.000K	>80	(L70B50>) 25.000h	120°	Ø260x84mm
468589	L	15W	1.087lm	3.000K	>80	(L70B50>) 25.000h	120°	Ø260x84mm
468596	L	15W	1.217lm	4.000K	>80	(L70B50>) 25.000h	120°	Ø260x84mm
468602	L	15W	1.087lm	3.000K	>80	(L70B50>) 25.000h	120°	Ø260x84mm
468619	L	15W	1.217lm	4.000K	>80	(L70B50>) 25.000h	120°	Ø260x84mm
468626	L	15W	1.087lm	3.000K	>80	(L70B50>) 25.000h	120°	Ø260x84mm

Dimensions

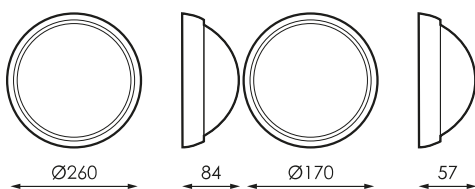

Photometry

