
















Specifications (Series luminaires)

	Electrical isolation	CI
	Voltage (V)	100-240V
Hz	Frecuency (Hz)	50-60Hz
	Dimming	No
	IP Tightness index	IP54
	Diffuser Material	VT-T
	Body	AL
K	Colour temperature	3.000K/4.000K
	CRI Colour rendering index	≥80
	Opening angle	80°
	Measures	140x70x71mm
	Mounting position	Empotrado Pared
	Operating temperature	-10 +35
	Flux (lm)	76lm
	Lifetime	(L70B50>) 30.000h




References



	W	ϕ_{LUM}	K			Δ	
495288	3W	76lm	3.000K	≥ 80	(L70B50>) 30.000h	80°	140x70x71mm
495295	3W	81lm	4.000K	≥ 80	(L70B50>) 30.000h	80°	140x70x71mm

Dimensions

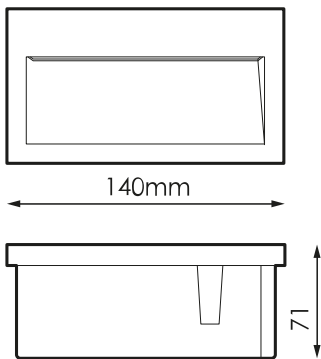

Photometry

