






MADE IN SPAIN Design by PRILUX



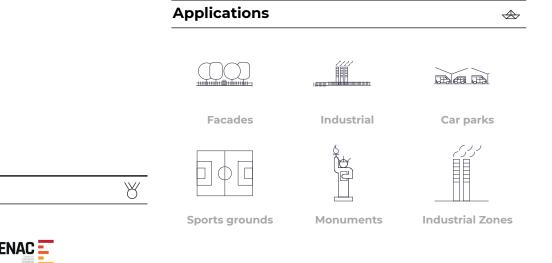

Certifications





1




### **Specifications (Series luminaires)**

1 V	Voltage (V)	220-240V	${\longleftrightarrow}$	Measures	500x250x55mm
Ιz	Frecuency (Hz)	50-60Hz	O kg	Weight	5.75Kg
	Current (A)	max.475mA		Wind Resistance	0,11m2
<u>ک</u>	LED number	36/36			
$\bigcirc$	Dimming	Yes	<u>A</u> tc	Operating temperature	-30°C + 50°C
					I
L 0 0 0	IP Tightness index	IP66	$\square$	Surges protection	No
	IK Impact resistance	IK09			
Ø	Body color	RAL9007	Φ <sub>LUM</sub>	Flux (lm)	4097lm
<u> </u>	Body	AL iap			
				Electrical isolation	ССІ
K	Colour temperature	RGBW-RGBW			
Ŕ	CRI Colour rendering index	RGBW		Lifetime	L70B10>100.000
<u>77</u> .	Optical	PEXLOM			·

Prilux guarantees a ± 10% tolerance in light flux measurements.

### Dimensions



 $\stackrel{}\longleftrightarrow$ 



Reference	es									
	<b>W</b> <sub>LED</sub>	W		φ	$\varphi_{_{\!\!\!\text{LED}}}$	$\varphi_{_{\text{LUM}}}$	-))	<u> </u>	$\bigcirc$	
609302	46W	54,5W	475mA	-lm	4710lm	4097lm	36	PEXLOM	Yes	



]\_\_\_

#### On request

$\bigcirc$	
Dali	VA00IOP
Bluetooth	AEXLOM
	AINLOM
	VA1212P
	SOIILOM
	S0135LOM
	S024L0M
	S071LOM
	S151LOM



#### Accessories

 $\langle \bigcirc \rangle$ 



#### 515788

ACCESSORY PARALUMEN NANTES RAL9005T