



















Specifications (Series luminaires)

	Electrical isolation	CI
	Voltage (V)	100-240V
	Frecuency (Hz)	50-60Hz
	Dimming	No
	IP Tightness index	IP65
	IK Impact resistance	IK08
	Diffuser Material	VT-P
	Body	Al
	Colour temperature	3.000K/4.000K
	CRI Colour rendering index	≥80
	Opening angle	28°
	Measures	170x168x140mm
	Mounting position	Superficie Lateral
	Operating temperature	-10 +35
	Flux (lm)	2345lm
	Lifetime	(L70B50>) 40.000h




References




	W	ϕ_{LUM}	K			Δ	
410113	22W	2345lm	3.000K	≥ 80	(L70B50>) 40.000h	28°	170x168x140mm
410120	22W	2399lm	4.000K	≥ 80	(L70B50>) 40.000h	28°	170x168x140mm

Dimensions

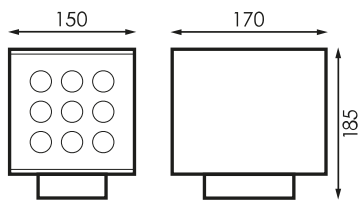

Photometry

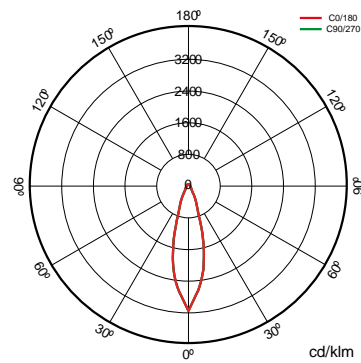

Info



NIZA's installation should only be done downwards