

















Specifications (Series luminaires)

	Voltage (V)	12V acV
Hz	Frecuency (Hz)	50-60Hz
	Dimming	No
	Bushing type	G53
	IP Tightness index	IP68
K	Colour temperature	RGB-RGB
	CRI Colour rendering index	>70
	Opening angle	100°
	Measures	177x104mm
	Flux (lm)	1.709lm
	Lifetime	(L70B50>) 30.000h
	CEE Energy classification	F

References

	W		
495035	20W	1650mA	1.709lm
534031	20W	1650mA	1.793lm
534048	18W	1500mA	RGB
534055	18W	1500mA	RGB

Dimensions

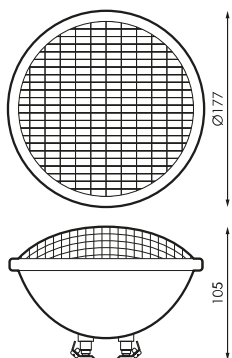

Photometry

Accessories



534062

TRANSFORMER
300W 12VAC IP65



534352

TRANSFORMER
500W 12VAC IP65