















## Specifications (Series luminaires)




	<b>Voltage (V)</b>	230V
Hz	<b>Frecuency (Hz)</b>	50-60Hz
	<b>Dimming</b>	No
	<b>Bushing type</b>	E14
	<b>IP Tightness index</b>	IP20
K	<b>Colour temperature</b>	3.000K/5.000K
	<b>CRI Colour rendering index</b>	>80
	<b>Opening angle</b>	360°
	<b>Measures</b>	25x60mm
	<b>Operating temperature</b>	-5°C~+35 °C
	<b>Flux (lm)</b>	217lm
	<b>Lifetime</b>	(L70B50>) 25.000h
	<b>CEE Energy classification</b>	F

## References



	W	$\phi_{LUM}$	K	$\leftrightarrow$
<b>482707</b>	2,5W	208lm	3.000K	25x60mm
<b>483315</b>	2,5W	217lm	5.000K	25x60mm

## Dimensions

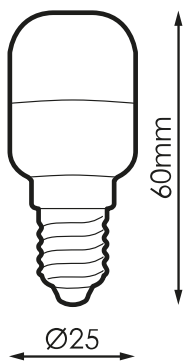

## Photometry

