














Specifications (Series luminaires)

	Voltage (V)	12V acV
Hz	Frecuency (Hz)	50-60Hz
Φ	Power factor (Cos fi)	Hasta >0,5
	Dimming	No
	Bushing type	G53
	IP Tightness index	IP20
K	Colour temperature	3.000K/5.000K
	CRI Colour rendering index	>80
	Opening angle	45°
	Measures	111x68mm
	Operating temperature	-5°C~+35 °C
Φ_{LUM}	Flux (lm)	902lm
	Lifetime	(L70B50>) 40.000h

References

	W	ϕ	ϕ_{LUM}	K	\leftrightarrow
497640	12W	>0,9	792lm	3.000K	111x67mm
497657	12W	>0,9	808lm	5.000K	112x67mm
576628	12W	>0,5	902lm	3.000K	111x68mm
576635	12W	>0,5	987lm	5.000K	111x68mm

Dimensions

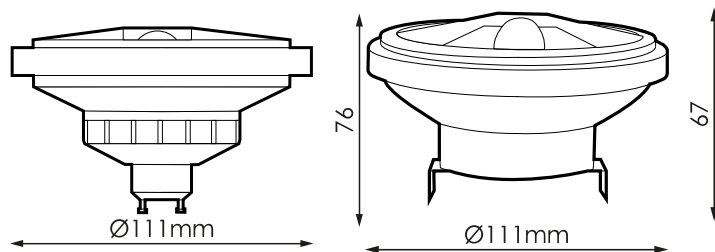

Photometry