














Specifications (Series luminaires)


	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
Φ	Power factor (Cos fi)	Hasta >0,5
	Dimming	Yes
	Bushing type	GU10
	IP Tightness index	IP20
K	Colour temperature	3.000K/5.000K
	CRI Colour rendering index	>80
	Opening angle	36°
	Measures	111x76mm
	Operating temperature	-5°C~+35 °C
Φ_{LUM}	Flux (lm)	1.013lm
	Lifetime	(L70B50>) 30.000h
	CEE Energy classification	A+

References



	W	ϕ	ϕ_{LUM}	K	\leftrightarrow
497671	12W	>0,9	1.013lm	5.000K	111x76mm
576581	12W	>0,5	902lm	3.000K	111x73mm
576598	12W	>0,5	987lm	5.000K	111x73mm
576604	12W	>0,5	902lm	3.000K	111x73mm
576611	12W	>0,5	987lm	5.000K	111x73mm

Dimensions

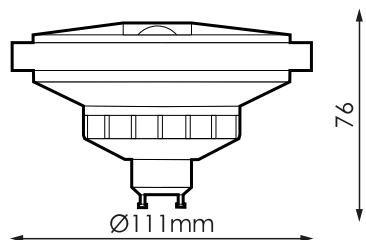

Photometry



Info



Until end of stock