



Applications



Offices



Classrooms



Retail



Home



Large surfaces



Hotels











Restaurants









Health care

Specifications (Series luminaires)




| | | |
|---|-----------------------------------|---------------|
|  | Voltage (V) | 230V |
| Hz | Frecuency (Hz) | 50Hz |
|  | Dimming | No |
|  | IP Tightness index | IP20 |
|  | Body color | White |
|  | Diffuser Material | PC-O |
|  | Body | FE |
| K | Colour temperature | 3.000K/4.000K |
|  | CRI Colour rendering index | ≥80 |
|  | Opening angle | 120° |

| | | |
|---|------------------------------|-------------------|
|  | Measures | Ø400x850mm |
|  | Mounting position | Suspendido |
|  | Operating temperature | -5 +40 |
|  | Flux (lm) | 2947lm |
|  | Electrical isolation | CII |
|  | Lifetime | (L70B50>) 40.000h |




Prilux guarantees a ± 10% tolerance in light flux measurements.

Dimensions

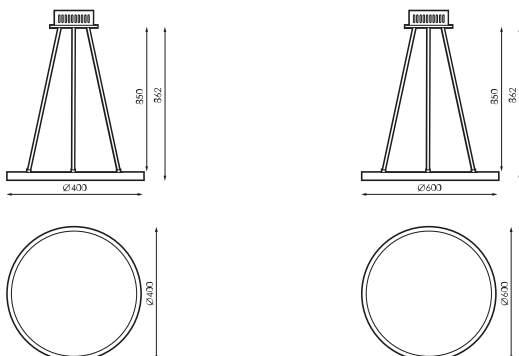


References




|  | W_{LED} | W |  | ϕ_{LED} | ϕ_{LUM} | K |  |
|---|-----------|-----|---|--------------|--------------|--------|---|
| 552349 | 32W | 35W | 850mA | 3454lm | 2831lm | 3.000K | No |
| 552356 | 32W | 35W | 850mA | 3578lm | 2947lm | 4.000K | No |
| 552363 | 32W | 35W | 850mA | 3507lm | 2911lm | 3.000K | No |
| 552370 | 32W | 35W | 850mA | 3612lm | 3041lm | 4.000K | No |

Photometry

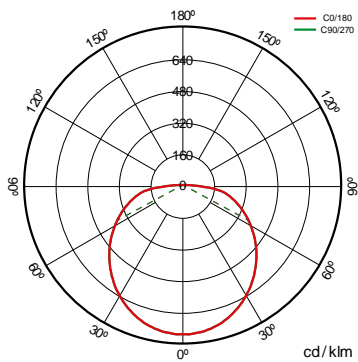

On request



Dali




Bluetooth package

description

Casambi version of our fixtures that enables through any Bluetooth® terminal via free APP that offers the control of flow regulation, color, scene configuration, behavior linked to schedules. Multiple accessories can be configured to work on the same network to unify the control of one or more spaces, being able to create groups, scenes and dynamic sequences to measure. The Bluetooth® device is valid for any DALI luminaire.

Info

For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es

Info 

You need DALI drive