






















## Specifications (Series luminaires)

	<b>Electrical isolation</b>	CII
	<b>Voltage (V)</b>	100-265V
<b>Hz</b>	<b>Frecuency (Hz)</b>	50-60Hz
	<b>Power factor (Cos fi)</b>	Hasta $\geq 0,8$
	<b>IP Tightness index</b>	IP20
	<b>Body color</b>	White
	<b>Diffuser Material</b>	PC-O
	<b>Body</b>	PC
<b>K</b>	<b>Colour temperature</b>	4.000K/4.000K
	<b>CRI Colour rendering index</b>	$\geq 80$
	<b>Opening angle</b>	160°
	<b>Measures</b>	1.193x29x35mm
	<b>Mounting position</b>	Superficie
	<b>Linkable</b>	No
	<b>Operating temperature</b>	-5 +35
	<b>Flux (lm)</b>	1921lm
	<b>Lifetime</b>	(L70B50>) 25.000h




## References



	W	$\phi_{LUM}$	K			
<b>441940</b>	1x9W	876lm	4.000K	White	584x29x35mm	No
<b>441957</b>	1x18W	1921lm	4.000K	White	1.193x29x35mm	No
<b>441964</b>	2x9W	1954lm	4.000K	White	584x80x35mm	No
<b>441971</b>	2x18W	3903lm	4.000K	White	1.193x80x35mm	No

## Dimensions

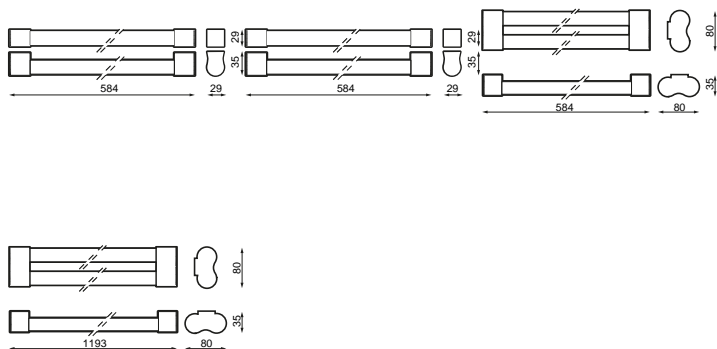

## Photometry

