



Applications



Home




Hotels




Restaurants




Retail



Offices



Classrooms



Halls



Health care

Specifications (Series luminaires)

	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
	Current (A)	max.900mA
ϕ	Power factor (Cos fi)	Hasta >0,9
	Dimming	No

	IP Tightness index	IP20
	Body color	White
	Diffuser Material	PC

K	Colour temperature	3000K-4000K-5700K
	CRI Colour rendering index	>80

	Measures	174x174x87mm
	Cut dimensions	Ø145-155
	Mounting position	Empotrado Techo

	Operating temperature	-20°C ~ +40°C
---	------------------------------	---------------


ϕ_{LUM}	Flux (lm)	1,903, 1,923, 1,936lm
--------------	------------------	-----------------------

	Electrical isolation	CII
---	-----------------------------	-----

	Lifetime	L70>60.000h
---	-----------------	-------------

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.


Dimensions

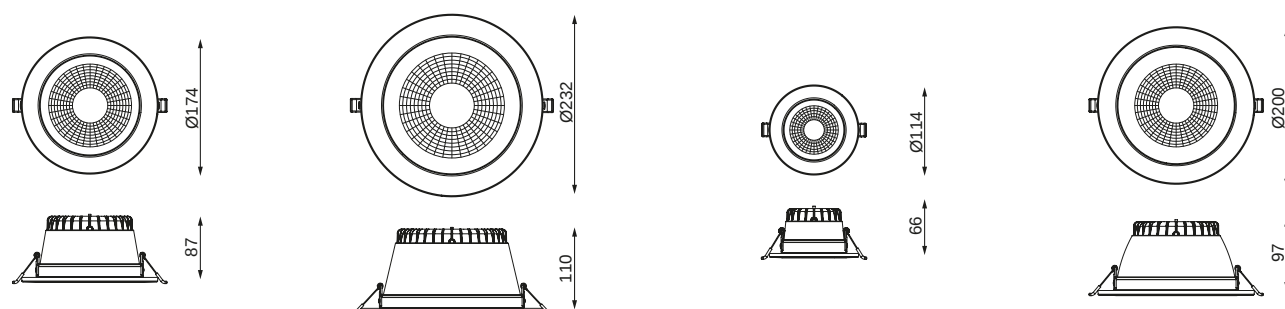


References

	W	ϕ_{LUM}	Δ	K	$\leftrightarrow$	∇
684477	10W	952lm 973lm 981lm	60°	3000K 4000K 5700K	114x114x66mm	>80
684484	20W	1903, 1923, 1936lm	60°	3000K 4000K 5700K	174x174x87mm	>80
684491	28W	2663, 2683, 2697lm	60°	3000K 4000K 5700K	200x200x97mm	>80
684507	35W	3329lm 3349lm 3363lm	60°	3000K 4000K 5700K	232x232x110mm	>80

Photometry

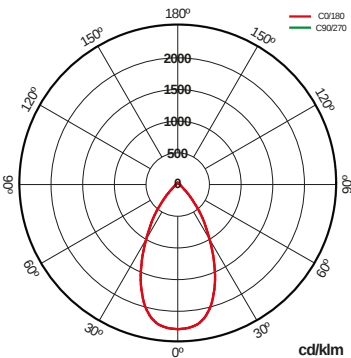

On request



Dali

Bluetooth

Accessories





684699

ACCESORIO
SUPERFICIE NEGRO
SEKOA SWITCH 20W



684620

200MM







684644

ARO DECORATIVO
NEGRO SEKOA
SWITCH 20W 174MM



684675

ACCESORIO
SUPERFICIE BLANCO
SEKOA SWITCH 20W



684668

ARO DECORATIVO
NEGRO SEKOA
SWITCH 35W 232MM