



MADE IN SPAIN
Design by PRILUX



Applications







Health care





Cleanrooms

Specifications (Series luminaires)









	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
	Current (A)	max.300mA
ϕ	Power factor (Cos fi)	Hasta 0,98
	LED number	112/224
	Dimming	No

	Measures	625x625x33mm
	Weight	8.2Kg


	Operating temperature	+35°C
---	------------------------------	-------

ϕ_{LUM}	Flux (lm)	7.522lm
--------------	------------------	---------

	IP Tightness index	IP65
	IK Impact resistance	IK08
	Diffuser Material	VT
	Body	AL
	Reflector	AL-BR

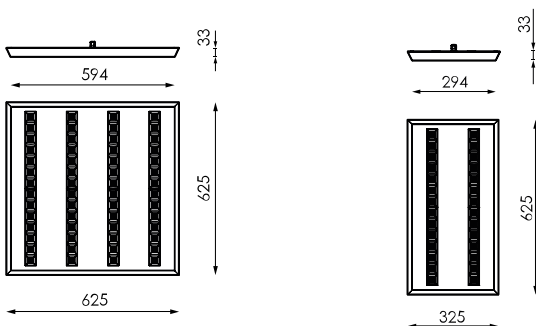
	Electrical isolation	CI
---	-----------------------------	----

	Lifetime	L80B10>150.000h L90B10>74.000h
---	-----------------	-----------------------------------

K	Colour temperature	4.000K/4.000K
	CRI Colour rendering index	>80
	UGR	UGR <19




Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

Dimensions



References



	W_{LED}	W		ϕ_{LED}	ϕ_{LUM}	K	
623438	48W	52W	300mA	8.358lm	7.522lm	4.000K	625x625x33mm
623445	24W	26W	300mA	4.179lm	3.761lm	4.000K	325x625x33mm