





Applications



Offices



Classrooms



Retail



Home



Large surfaces



Hotels



Restaurants

















Health care

Certifications



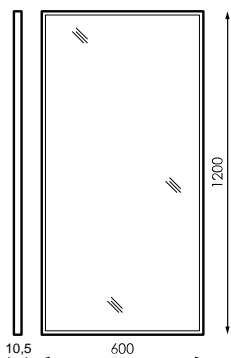
Specifications (Series luminaires)

 Voltage (V)	230V
Hz Frecuency (Hz)	50-60Hz
 Dimming	No
 IP Tightness index	IP20
 IP installed Sealing rating	40
 Body color	White
 Diffuser Material	PMMA P
 Body	FE
K Colour temperature	4.000K/4.000K
 CRI Colour rendering index	>80
 UGR	<19

 Measures	300x1.200mm
 Mounting position	Empotrar
 Flux (lm)	6.089lm
 Electrical isolation	CII
 Lifetime	(L70B50>) 50.000h





Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

Dimensions



References



	W_{LED}	W		ϕ_{LED}	ϕ_{LUM}	K		
483957	60W	56W	1000mA	7.517lm	6.089lm	4.000K	575 x 1.175	No

Accessories



207638

TRANS POWER
CABLE 3X0.75 1M 1PC



kit 1h



472500

SUSPENSION KIT
1.5M SILENT LED (4
UNITS)



Dali-Bluetooth



383806

WH SURFACE
DRAWER SILENT
LED 120X60CM



537933







384070

WH FRAME RECESS
PLASTER SILENT LED
120X60CM



Solutions

S



CTE Pack

description



Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.



CLASSROOMS Pack

description



Regulation by contribution of natural light and stand alone presence. Lighting control system to meet CTE requirements and optimize energy use by taking advantage of natural light and automatic shutdown in case of absence.



BLUETOOTH Pack

description



Device that enables DALI luminaire control through any Bluetooth® terminal via free APP that offers us control of flow regulation, color, scene configuration, behavior linked to schedules.

Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es

Rules



UGR <19 with R(%):70/50/20, S(m2)<30 and h(m)>3,15.

Info



UGR <19 with R(%):70/70/30,S(m2)<36 y h(m)≥2,8.