


Specifications (Series luminaires)

	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50/60Hz
	Power factor (Cos fi)	Hasta ≥0,9
	Dimming	DALI
	IP Tightness index	IP65
	Body color	White
	Diffuser Material	PMMA-O
	Body	FE
K	Colour temperature	4000K-4000K
	CRI Colour rendering index	>80
	Opening angle	90°
	Measures	0x0x0mm
	Mounting position	Empotrado Techo
	Operating temperature	-25°C ~ +45°C
	Flux (lm)	max. 4315lm
	Electrical isolation	CII
	Lifetime	50.000h

References

		W_{LED}	W		ϕ	ϕ_{LED}	ϕ_{LUM}	K		
622974		36W	40W	1000mA	$\geq 0,9$	5600lm	4315lm	4000K	575 x 575	No
627849		36W	40W	1000mA	$\geq 0,9$	5600lm	4315lm	4000K	575 x 575	Yes
628761		36W	40W	1000mA	$\geq 0,9$	5600lm	4315lm	4000K	275 x 1175	No
629058		36W	40W	1000mA	$\geq 0,9$	5600lm	4315lm	4000K	275 x 1175	Yes

Dimensions

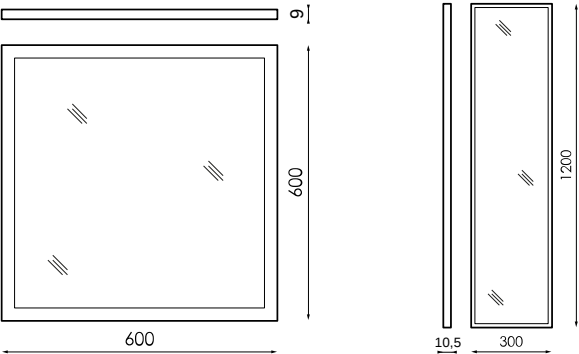

Photometry

