
Slimline Led Neo

PRILUX



Specifications (Series luminaires)

Electrical isolation	CII
Voltage (V)	230V
Frecuency (Hz)	50/60Hz
Power factor (Cos fi)	Hasta ≥0,5

IP Tightness index	IP44
IP installed Sealing rating	-
Body color	White
Diffuser Material	PC-O
Body	AL

Colour temperature	6500K-6500K
CRI Colour rendering index	>80
Opening angle	122°

Measures	1.200x25x35mm
Linkable	No
Power supply	Incluida

Operating temperature	-

Flux (lm)	max. 2004lm

Lifetime	(L70B50>)30.000H


Slimline Led Neo

PRILUX

References

	W	Φ_{LUM}	K			
233958	16W	2004lm	6500K	White	1.200x25x35mm	No

Dimensions

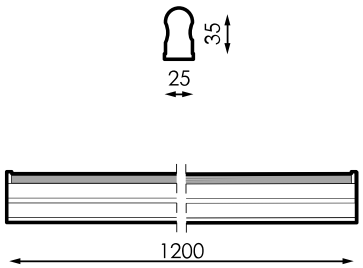

Photometry

Info

Hasta fin de existencias