




Specifications (Series luminaires)		
	Electrical isolation	CI
	Voltage (V)	230V
	Frecuency (Hz)	50/60Hz
	Power factor (Cos fi)	Hasta ≥0,5
	Dimming	No
	Bushing type	R7S
	IP Tightness index	IP20
	Body color	White
	Diffuser Material	PC-T
	Body	PC
	Colour temperature	3000K-4000K
	CRI Colour rendering index	>80
	Opening angle	120°
	Measures	118x37x26mm
	Operating temperature	-
	Flux (lm)	max. 951lm
	Lifetime	L70B50>30000h
	Lifetime	(L70B50>)30.000h
	N° of ignitions	100.000
	CEE Energy classification	A+

References					
	W	ϕ	ϕ_{LUM}	K	$\leftrightarrow$
159920	7,5W	$\geq 0,5$	661lm	4000K	118x37x26mm
				4000K	
159982	10W	$\geq 0,5$	951lm	3000K	118x37x26mm
				3000K	

Dimensions

Photometry

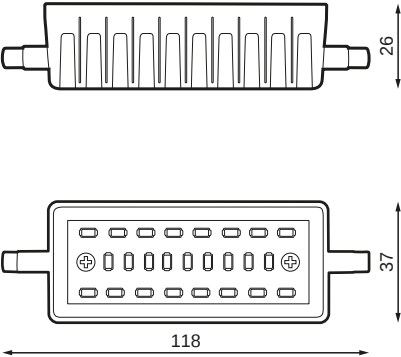

Info

Hasta fin de existencias