














Specifications (Series luminaires)




	Voltage (V)	12Vac/dc -24V dcV
Hz	Frecuency (Hz)	50-60Hz
Φ	Power factor (Cos fi)	Hasta >0,5
	Dimming	No
	Bushing type	E27
	IP Tightness index	IP20
K	Colour temperature	3.000K/4.000K
	CRI Colour rendering index	>80
	Opening angle	210°
	Measures	60x110mm
	Operating temperature	-5°C~+35 °C
Φ_{LUM}	Flux (lm)	805lm
	Lifetime	(L70B50>) 25.000h
	CEE Energy classification	E

References



	W	ϕ	ϕ_{LUM}	K	\leftrightarrow
402156	8W	>0,5	764lm	3.000K	60x110mm
402163	8W	>0,5	805lm	4.000K	60x110mm

Dimensions

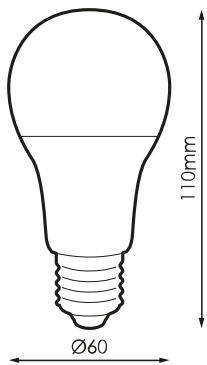

Photometry

