





MADE IN SPAIN
Design by PRILUX



Applications



Offices



Classrooms



Retail



Large surfaces



Hotels














Restaurants









Health care

Specifications (Series luminaires)




| | | |
|--|-----------------------------------|-----------------------------|
|  | Voltage (V) | 220-240V |
| Hz | Frecuency (Hz) | 50-60Hz |
|  | Current (A) | max.300mA |
| ϕ | Power factor (Cos fi) | Hasta 0,97 |
|  | LED number | 112/112 |
|  | Dimming | No |
|  | IP Tightness index | IP20 |
|  | IK Impact resistance | IK04 |
|  | Diffuser Material | PC metalizado por altovacio |
|  | Body | FE |
|  | Reflector | BL-MT |
| K | Colour temperature | 4.000K/4.000K |
|  | CRI Colour rendering index | >80 |
|  | UGR | UGR <19 |

| | | |
|---|------------------------------|-----------------------------------|
|  | Measures | 295x1.195x40mm |
|  | Weight | 5.7Kg |
|  | Mounting position | Empotrar |
|  | Operating temperature | +35°C |
| ϕ_{LUM} | Flux (lm) | 3.819lm |
|  | Electrical isolation | CI |
|  | Lifetime | L80B10>150.000h L90B10>74.000h |

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

Dimensions

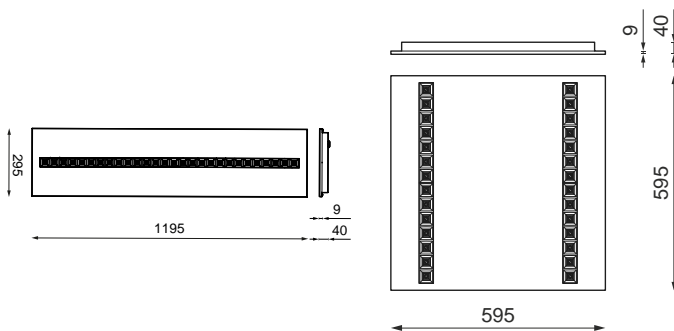




References



| | W_{LED} | W | | ϕ_{LED} | ϕ_{LUM} | K | |
|---------------|-----------|-----|-------|--------------|--------------|--------|----------------|
| 526340 | 24W | 26W | 300mA | 4.345lm | 3.879lm | 4.000K | 595x595x40mm |
| 530118 | 24W | 26W | 300mA | 4.345lm | 3.879lm | 4.000K | 595x595x40mm |
| 562713 | 24W | 26W | 300mA | 4.345lm | 3.819lm | 4.000K | 595x595x40mm |
| 562720 | 24W | 26W | 300mA | 4.345lm | 3.819lm | 4.000K | 595x595x40mm |
| 575720 | 24W | 26W | 300mA | 4.345lm | 3.879lm | 4.000K | 295x1.195x40mm |
| 575737 | 24W | 26W | 300mA | 4.345lm | 3.879lm | 4.000K | 295x1.195x40mm |
| 575744 | 24W | 26W | 300mA | 4.345lm | 3.819lm | 4.000K | 295x1.195x40mm |
| 575751 | 24W | 26W | 300mA | 4.345lm | 3.819lm | 4.000K | 295x1.195x40mm |

Photometry

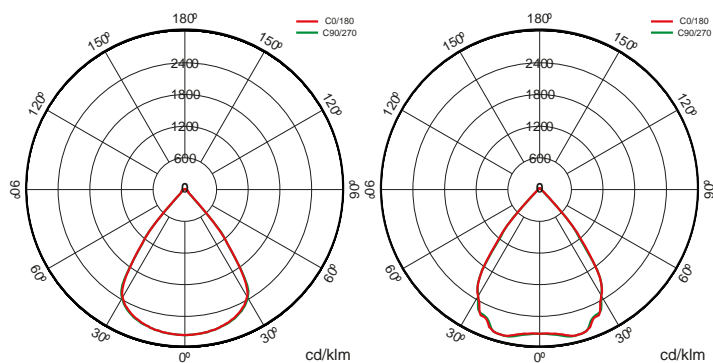

On request



Bluetooth



Available RAL colors (Consult)

K

>80 3.000K

>80 4.000K

>80 4.000K

Others (consult)



AL-MT (matt aluminium)

DO-MT (Matt gold)

CO-MT (Copper matt)

NE-MT (Matt black)



Solutions

S



CTE Pack

description

Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.



Was Indoor

description

The WAS INDOOR solution is specifically aimed at increasing the well-being of users in places such as hospitals, nursing homes, wellness centres, classrooms and offices. The circadian lighting is applied in workplaces to improve visual conditions, comfort and the workers' performance, resulting in a higher productivity and a better development of the company.



Bluetooth package

description

Casambi version of our fixtures that enables through any Bluetooth® terminal via free APP that offers the control of flow regulation, color, scene configuration, behavior linked to schedules. Multiple accessories can be configured to work on the same network to unify the control of one or more spaces, being able to create groups, scenes and dynamic sequences to measure. The Bluetooth® device is valid for any DALI luminaire.

Info

For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es



| | |
|-------------|---|
| Info |  |
| Led module | |