Summet

PRILUX



Specifications (Series luminaires)

Electrical isolation	CIII
Voltage (V)	3,7V
Dimming	No
IP Tightness index	IP65
Body color	White
Body	ABS
Colour temperature	3000K-4000K
CRI Colour rendering index	>80
Opening angle	90°
Measures	1.445x96x79mm
Operating temperature	-
Flux (lm)	max. 200lm
Guarantee	2garantia
Lifetime	(L70B50>)15.000H


Summet

PRILUX

References

	W	Φ_{LUM}	K					
472074	1,5W	200lm	3000K	Black	>80	(L70B50>)15.000H	90°	144,5x96x79mm
472098	1,5W	200lm	3000K	White	>80	(L70B50>)15.000H	90°	144,5x96x79mm
472104	1,5W	200lm	4000K	White	>80	(L70B50>)15.000H	90°	144,5x96x79mm
472111	1,5W	200lm	3000K	Gray	>80	(L70B50>)15.000H	90°	144,5x96x79mm
472128	1,5W	200lm	4000K	Gray	>80	(L70B50>)15.000H	90°	144,5x96x79mm

Dimensions

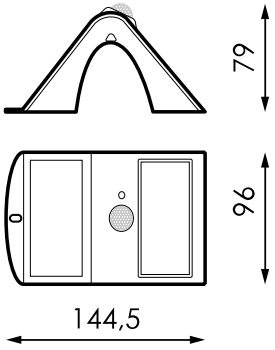

Photometry

Info

Batería reemplazable en los modelos de 3,2W y 6,8W