





















Specifications (Series luminaires)




	Electrical isolation	CI
	Voltage (V)	100-240V
Hz	Frecuency (Hz)	50-60Hz
ϕ	Power factor (Cos fi)	Hasta $\geq 0,5$
	Dimming	No
	IP Tightness index	IP65
	IK Impact resistance	IK08
	Diffuser Material	VT
	Body	Al
K	Colour temperature	3.000K/4.000K
	CRI Colour rendering index	≥ 80
	Opening angle	77°
	Measures	60x128x56mm
	Mounting position	Superficie Lateral
	Operating temperature	-10 +35
ϕ_{LUM}	Flux (lm)	454lm
	Lifetime	(L70B50>) 40.000h

References



		W	ϕ_{LUM}	K			Δ	
410076	Directo	7W	454lm	3.000K	≥ 80	(L70B50> 40.000h	77°	60x128x56mm
410083	Directo	7W	488lm	4.000K	≥ 80	(L70B50> 40.000h	77°	60x128x56mm
410090	Directo/ Indirecto	14W	908lm	3.000K	≥ 80	(L70B50> 40.000h	77°	60x158x56mm
410106	Directo/ Indirecto	14W	976lm	4.000K	≥ 80	(L70B50> 40.000h	77°	60x158x56mm

Dimensions

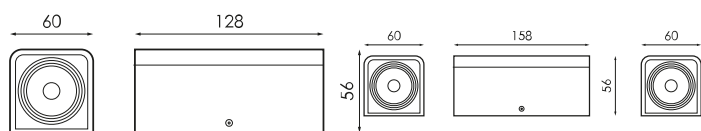

Photometry

