



Applications



Offices



Classrooms



Cleanrooms



Retail



Home



Large surfaces



Hotels



Restaurants











Health care




Certifications



Specifications




	Voltage (V)	220-240
Hz	Frecuency (Hz)	50-60
	Current (A)	670mA
ϕ	Power factor (Cos fi)	0.9
	IP Tightness index	54
	Body color	White
	Diffuser Material	VT
	Body	AL
	Reflector	AL AN
K	Colour temperature	3.000K/4.000K
	CRI Colour rendering index	>80

	Measures	Ø220x85
	Mounting position	Empotrar
ϕ_{LUM}	Flux (lm)	2.295
	Electrical isolation	CI



Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

Dimensions

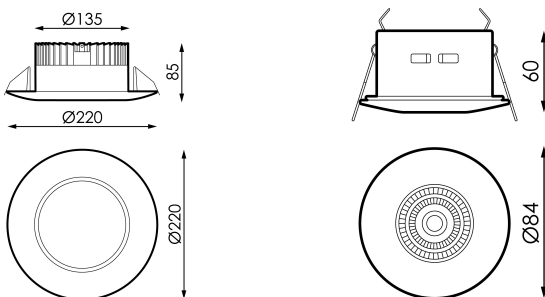


References



	W	W		ϕ_{LED}	ϕ_{LUM}	Δ	K	\leftrightarrow
233279	35W	42W	1.030mA	3.638	2.913	60°	3.000K/4.000K	Ø220x85
233286	35W	42W	1.030mA	3.871	3.099	60°	3.000K/4.000K	Ø220x85
233293	25W	29W	670mA	2.866	2.295	60°	3.000K/4.000K	Ø220x85
233309	25W	29W	670mA	3.049	2.442	60°	3.000K/4.000K	Ø220x85
234054	8W	9W	670mA	834lm	667lm	45°	3.000K/4.000K	Ø84x60
234061	8W	9W	670mA	879lm	703lm	45°	3.000K/4.000K	Ø84x60
234078	8W	9W	670mA	834lm	667lm	45°	3.000K/4.000K	Ø84x60
234085	8W	9W	670mA	879lm	703lm	45°	3.000K/4.000K	Ø84x60

Photometry

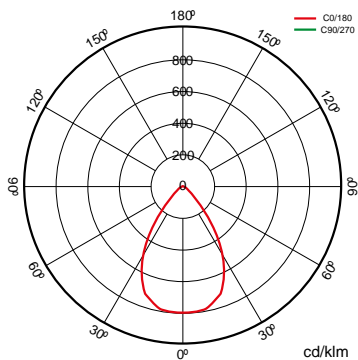

On request



Dali



Solutions

S



CTE Pack

description



Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.



Bluetooth package

description



Casambi version of our fixtures that enables through any Bluetooth® terminal via free APP that offers the control of flow regulation, color, scene configuration, behavior linked to schedules. Multiple accessories can be configured to work on the same network to unify the control of one or more spaces, being able to create groups, scenes and dynamic sequences to measure. The Bluetooth® device is valid for any DALI luminaire.

Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.grupoprilux.com



Rules



INOX steel clip.

Info



You need DALI drive