



Applications



Offices



Classrooms



Cleanrooms



Retail



Home



Large surfaces



Hotels












Restaurants







Health care

Specifications (Series luminaires)




	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
	Current (A)	max.1030mA
ϕ	Power factor (Cos fi)	Hasta 0,9
	Dimming	No
	IP Tightness index	IP54
	Body color	White
	Diffuser Material	VT
	Body	AL
	Reflector	AL AN
K	Colour temperature	3.000K/4.000K
	CRI Colour rendering index	>80

	Measures	Ø220x85mm
	Mounting position	Empotrar
ϕ_{LUM}	Flux (lm)	2.442lm
	Electrical isolation	CI
	Lifetime	L70>30.000h

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

Dimensions

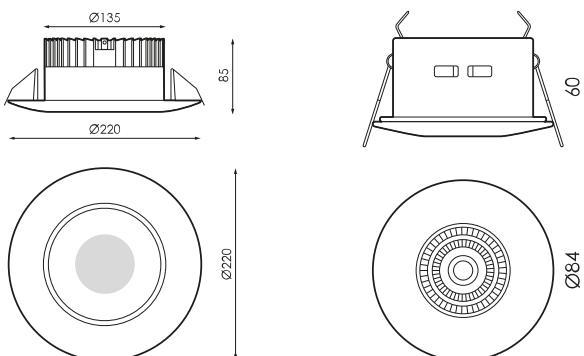




References



	W _{LED}	W		ϕ_{LED}	ϕ_{LUM}	Δ	K	\leftrightarrow
233279	35W	42W	1030mA	3.638lm	2.913lm	60°	3.000K	Ø220x85mm
233286	35W	42W	1030mA	3.871lm	3.099lm	60°	4.000K	Ø220x85mm
233293	25W	29W	670mA	2.866lm	2.295lm	60°	3.000K	Ø220x85mm
233309	25W	29W	670mA	3.049lm	2.442lm	60°	4.000K	Ø220x85mm
234054	8W	9W	670mA	834lm	667lm	45°	3.000K	Ø84x60mm
234061	8W	9W	670mA	879lm	703lm	45°	4.000K	Ø84x60mm
234078	8W	9W	670mA	834lm	667lm	45°	3.000K	Ø84x60mm
234085	8W	9W	670mA	879lm	703lm	45°	4.000K	Ø84x60mm

Photometry

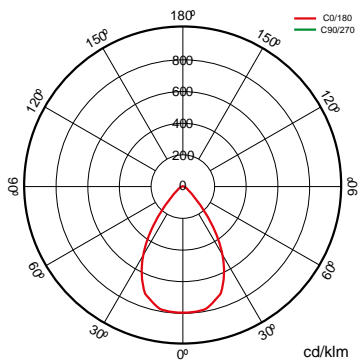

On request



Dali



Emergency kit



Solutions

S



CTE Pack

description

Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.



CLASSROOMS Pack

description

Regulation by contribution of natural light and stand alone presence. Lighting control system to meet CTE requirements and optimize energy use by taking advantage of natural light and automatic shutdown in case of absence.



Bluetooth package

description

Casambi version of our fixtures that enables through any Bluetooth® terminal via free APP that offers the control of flow regulation, color, scene configuration, behavior linked to schedules. Multiple accessories can be configured to work on the same network to unify the control of one or more spaces, being able to create groups, scenes and dynamic sequences to measure. The Bluetooth® device is valid for any DALI luminaire.

Info

For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es



Info



UGR <19 with R(%):70/70/30,S(m2)<36 y h(m)≥2,8.