




















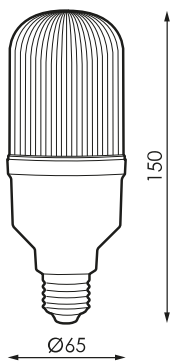
Specifications (Series luminaires)

	Electrical isolation	CCI
	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
	Power factor (Cos fi)	Hasta $\geq 0,5$
	Dimming	No
	Bushing type	E27
	IP Tightness index	IP20
	Body color	White
	Diffuser Material	PC-O
	Body	PC
K	Colour temperature	3000K-5000K
	CRI Colour rendering index	80cromatica
	Opening angle	270°
	Measures	65x150mm
	Flux (lm)	1438lm
	Lifetime	(L70B50>)40.000h
	Lifetime	(L70B50>)40.000h
	CEE Energy classification	A+

References

	W	ϕ	ϕ_{LUM}	K	\leftrightarrow
481403	15W	$\geq 0,5$	1502lm	4000K	65x150mm
481410	15W	$\geq 0,5$	1563lm	5000K	65x150mm
482134	15W	$\geq 0,5$	1438lm	3000K	65x150mm

Dimensions



Photometry