
















Specifications (Series luminaires)




	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
	Dimming	No
	Bushing type	E14
	IP Tightness index	IP20
K	Colour temperature	3.000K/3.000K
	CRI Colour rendering index	>80
	Opening angle	360°
	Measures	15x53mm
	Operating temperature	-5°C~+35 °C
	Flux (lm)	507lm
	Lifetime	(L70B50>) 25.000h
	CEE Energy classification	F

References



	W	ϕ_{LUM}	K	
482684	3,3W	507lm	3.000K	15x53mm

Dimensions

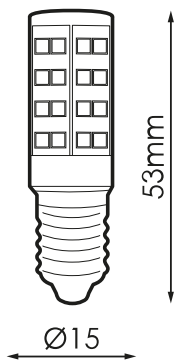

Photometry

