


















Specifications (Series luminaires)

| | | |
|---|-----------------------------------|------------------|
|  | Electrical isolation | CI |
|  | Voltage (V) | 220-240V |
| Hz | Frecuency (Hz) | 50-60Hz |
|  | Power factor (Cos fi) | Hasta $\geq 0,9$ |
|  | Dimming | No |
|  | IP Tightness index | IP44 |
|  | Body color | White |
|  | Diffuser Material | PC-O |
|  | Body | PC |
| K | Colour temperature | 3.000K/4.000K |
|  | CRI Colour rendering index | ≥ 80 |
|  | Opening angle | 125° |
|  | Measures | Ø330mm |
|  | Mounting position | Superficie |
|  | Operating temperature | -5 +35 |
|  | Flux (lm) | 1477lm |
|  | Lifetime | L70 > 25.000h |




References



| | W | ϕ_{LUM} | K | | | | |
|---------------|-----|--------------|--------|-----------|-------|----------------------------|----|
| 470124 | 20W | 1477lm | 3.000K | ≥ 80 | White | $\varnothing 330\text{mm}$ | No |
| 470131 | 20W | 1528lm | 4.000K | ≥ 80 | White | $\varnothing 330\text{mm}$ | No |
| 470148 | 30W | 2197lm | 3.000K | ≥ 80 | White | $\varnothing 380\text{mm}$ | No |
| 470155 | 30W | 2253lm | 4.000K | ≥ 80 | White | $\varnothing 380\text{mm}$ | No |

Dimensions

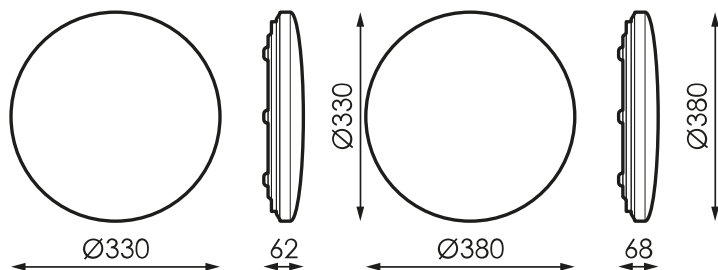

Photometry

