

## Specifications (Series luminaires)



	<b>Electrical isolation</b>	CII
	<b>Voltage (V)</b>	V
	<b>Frecuency (Hz)</b>	50/60Hz
	<b>Power factor (Cos fi)</b>	Hasta >0,5
	<b>Dimming</b>	No
	<b>IP Tightness index</b>	IP20
	<b>Body color</b>	White
	<b>Diffuser Material</b>	PC
	<b>Body</b>	PC
	<b>Colour temperature</b>	3000K-4000K-6500K
	<b>CRI Colour rendering index</b>	>80
	<b>Opening angle</b>	120°
	<b>Measures</b>	330x330x53mm
	<b>Mounting position</b>	Surface
	<b>Inclination</b>	-
	<b>Operating temperature</b>	-20°C ~ +45°C
	<b>Flux (lm)</b>	2,203, 2,226, 2,253lm
	<b>Lifetime</b>	(L70B50>)25.000h




## References



	W	$\phi_{LUM}$	K				
<b>684194</b>	20W	2203, 2226, 2253lm	3000K 4000K 6500K	>80	White	330x330x53mm	No

## Dimensions

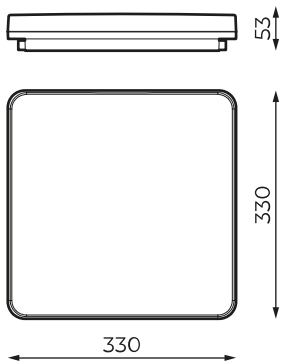

## Photometry

