air conditioner

AUX

C-Smart White

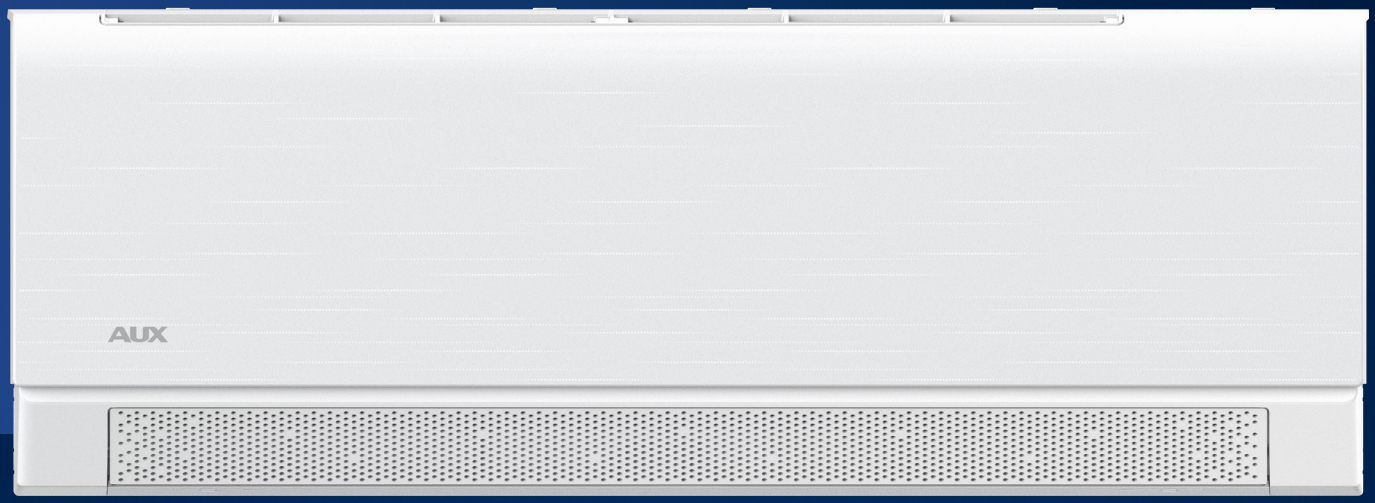

The C-Smart series is a perfect combination of contemporary design and innovative features, created with comfort, elegance, and unique aesthetics in mind

R32

UV

A++
COOLING

A+
HEATING

AIR CONDITIONER
5
YEARS
OF WARRANTY

COMPRESSOR
10
YEARS
OF WARRANTY

HEALTH

- UV Sterilisation
- 57°C Sterilisation
- Self-cleaning mode
- Antibacterial filter
- Temperature range setting
- PM2.5 filter
- Additional air filter
- Anti-mould mode
- Washable air filter

ECOLOGY

- R32 Refrigerant
- Eco mode
- Stand-by mode 0,3W

CONVENIENCE

- Auto-diagnosis mode
- 24H timer
- LED display
- Dual condensation drainage
- In-built Wi-Fi module
- Wireless controller
- Heating at -25°C

COMFORT

- 4D Airflow
- Vertical movement of the air louvers
- Horizontal movement of the air louvers
- Anti-Cold-Air mode
- Night mode

COMFORT

- I FEEL mode
- Turbo mode
- Auto mode
- Cooling mode
- Heating mode
- 8°C heating mode
- Dehumidification mode
- Fan mode
- Quiet operation mode
- Easy and quick installation

TECHNOLOGY

- Inverter technology
- Drip tray heater of the outdoor unit
- Intelligent defrosting
- Fire-resistant electrical box
- Gold-coated outdoor unit fins
- Gold-coated indoor unit fins
- Hydrophilic aluminium blades
- Super EMC
- Automatic restart

High cooling efficiency

Faster, more efficient cooling and heating thanks to the new louvre designed specifically for larger rooms.

Innovative airflow control

The contoured louvre with 2,430 micro-holes ensures maximum comfort and precise airflow, preventing cold air drafts.

UV-C lamp sterilisation



UV-C lamp sterilisation eliminates up to 99.9% of microorganisms, bacteria, fungi, and other airborne contaminants.

Sterilisation at 57°C

The heat exchanger holds 57°C long enough to effectively eliminate microorganisms, bacteria, and viruses.

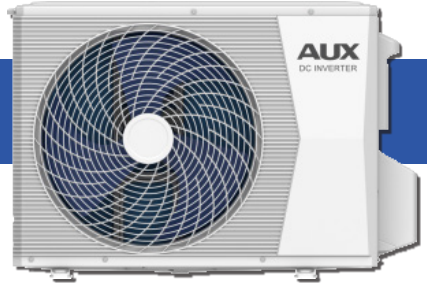

C-Smart White

CAA Series

AUX-09/12/18/24CAA AUX-18/24CA

Model			AUX-09CAA	AUX-12CAA	AUX-18CAA AUX-18CA	AUX-24CAA AUX-24CA
Cooling efficiency		[kW]	2,75 (0,60 - 4,00)	3,50 (0,80 - 4,20)	5,40 (1,30 - 5,90)	7,30 (1,80 - 7,40)
Heating efficiency		[kW]	3,30 (0,80 - 4,20)	3,85 (1,00 - 4,20)	5,60 (1,30 - 6,00)	7,30 (1,80 - 7,40)
Power supply		[V~,Hz,Ph]	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1
Operating current	Cooling	[A]	3,70 (0,56 - 5,32)	5,50 (0,70 - 7,80)	7,30 (2,20 - 9,30)	10,00 (1,00 - 12,00)
	Heating	[A]	4,00 (1,02 - 5,32)	5,90 (1,50 - 8,00)	6,90 (2,00 - 8,00)	10,00 (1,00 - 11,00)
Energy consumption	Cooling	[W]	780 (100 - 1200)	1180 (100 - 1600)	1650 (290 - 2100)	2200 (230 - 2700)
	Heating	[W]	840 (200 - 1200)	1100 (300 - 1600)	1550 (250 - 1800)	2200 (230 - 2530)
Maximum current draw		[A]	9,0	9,5	12,0	16,0
Maximum power consumption		[W]	1600	1900	2400	3400
SEER / SCOP		-	7,60 / 4,20	7,10 / 4,10	7,00 / 4,10	6,90 / 4,20
Energy efficiency class	Cooling	-	A++	A++	A++	A++
	Heating	-	A+	A+	A+	A+
Indoor unit			**AUX-09CAA/I**	**AUX-12CAA/I**	**AUX-18CAA/I AUX-18CA/I**	**AUX-24CAA/I AUX-24CA/I**
Airflow rate		[m³/h]	650/570/515/460	650/570/515/460	900/800/750/650	1300/1200/1010/870
Sound power level		[dB(A)]	53	53	58	62
Sound pressure level		[dB(A)]	19 - 39	20 - 41	21 - 48	22 - 50
Dimensions of the indoor unit		[mm]	774 x 298 x 202	774 x 298 x 202	997 x 312 x 222	1145 x 331 x 230
Weight of the indoor unit		[kg]	7,5	8,0	11,0	13,0
Outdoor unit			**AUX-09CAA/O**	**AUX-12CAA/O**	**AUX-18CAA/O AUX-18CA/O**	**AUX-24CAA/O AUX-24CA/O**
Refrigerant gas	Type	-	R32	R32	R32	R32
	Factory charge (up to 5m)	[g]	550	600	1030	1300
	Additional charge	[g/m]	20	20	20	30
Sound power level		[dB(A)]	62	62	62	64
Sound pressure level		[dB(A)]	49	49	51	52
Dimensions of the outdoor unit		[mm]	710 x 280 x 530	710 x 280 x 530	785 x 300 x 555	900 x 350 x 700
Weight of the outdoor unit		[kg]	23,0	23,0	28,5	39,0
Operation of the ODU (outside temp.)	Cooling	[°C]	-10	-10	-10	-10
	Heating	[°C]	-25	-25	-25	-25
Pipe connections (diameter)	Liquid	[inches]	1/4	1/4	1/4	1/4
	Gas	[inches]	3/8	3/8	1/2	5/8
Maximum piping length		[m]	20	20	20	25
Maximum height difference		[m]	10	10	10	15

R32

A++ COOLING

A+ HEATING

AIR CONDITIONER 5 YEARS OF WARRANTY

COMPRESSOR 10 YEARS OF WARRANTY

Wireless controller Type C



Wi-Fi 2.0 control module

Air conditioning units contain fluorinated greenhouse gases R32.

We reserve the right to errors in descriptions, appearance, functions, technical parameters, and dimensional drawings resulting from the continuous improvement of our devices.

Dimensional drawings

C-Smart White

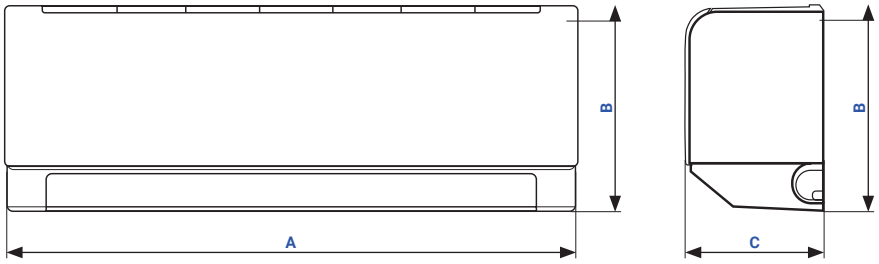

Indoor unit	A	B	C
9k Btu	774	298	202
12k Btu	774	298	202
18k Btu	997	312	222
24k Btu	1145	331	230

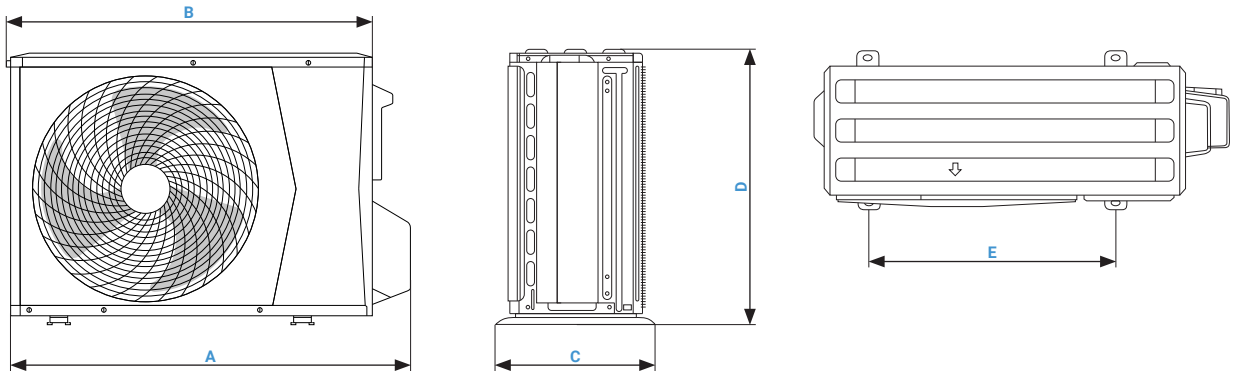

Outdoor unit	A	B	C	D	E
9k Btu	790	710	310	530	480
12k Btu	790	710	310	530	480
18k Btu	880	785	350	555	545
24k Btu	960	900	390	700	630

Air conditioning units contain fluorinated greenhouse gases R32.
We reserve the right to errors in descriptions, appearance, functions, technical parameters, and dimensional drawings resulting from the continuous improvement of our devices.

Kraków:
ul. Kotlarska 34
wienkra@wienkra.pl

Warszawa - Janki:
ul. Sokołowska 15
wienkra-waw@wienkra.pl

Wrocław:
al. Armii Krajowej 61
wienkra-wro@wienkra.pl