
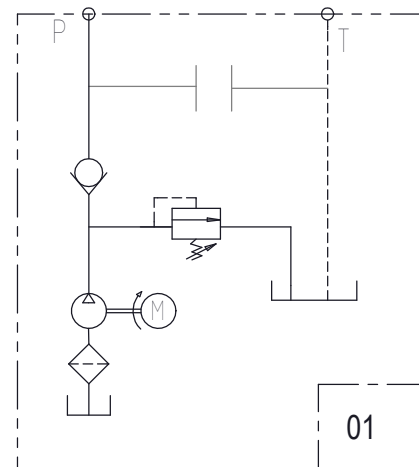
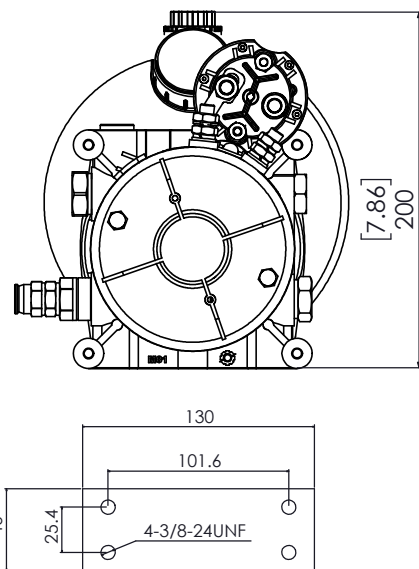


1 2 3 4 5 6 7 8

THIS DRAWING IS BEING SUBMITTED FOR YOUR APPROVAL OF THIS DESIGN ON YOUR APPLICATION AND REQUIREMENTS.
A SIGNATURE IS REQUIRED BEFORE AN ORDER CAN BE PROCESSED.



APPROVED BY _____ APPROVAL DATE ____/____/____

REV	DESCRIPTION	DATE	SIGNATURE	CHECKED
XXX	XXX	00/00/00	XXX	XXX
XXX	XXX	00/00/00	XXX	XXX
XXX	XXX	00/00/00	XXX	XXX

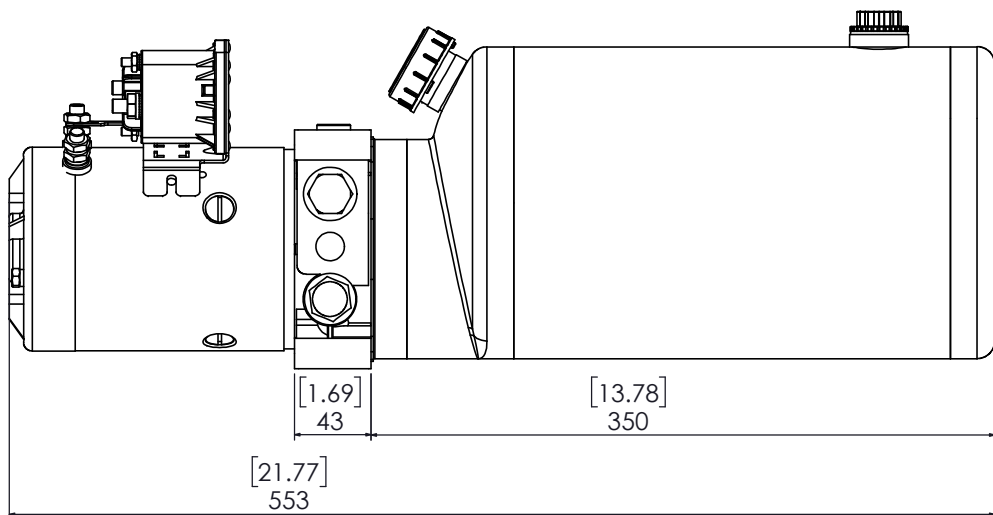

Network 标签

MODEL 16DA010H212A
Relief Valve Setting 2500PSI
Motor(KW) 1.6KW Voltage 12V
Pump Disp 2.1ML Flow 5.2LPM
Tank Usable 5.7 Litres

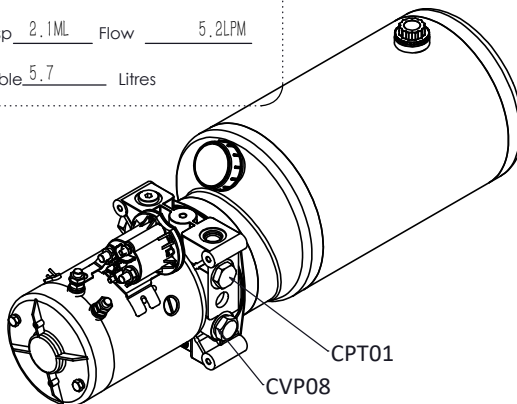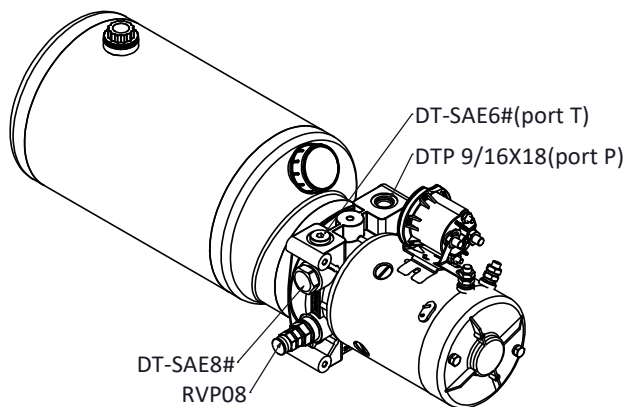

TOLERANCE :mm
> 0 ±0.1
> 6 ±0.2
> 30 ±0.3
> 120 ±1
> 315 ±2
> 1000 ±5

MOCEN
www.mocen.com.cn

SPECIFICATIONS

ELECTRICAL MOTOR	416A-2P-M,DC12V,1.6KW
FLOW RATE	5.2LPM@11MPA
MAX. PRESSURE	3000PSI
RELIEF SETTING	2500PSI
GEAR PUMP DISP.	G210T 2.1mL/REV
RESERVOIR	LS2,STEEL,5.6L
REMOTE CONTROL	N/A
MOUNTING	VERTICAL OR HORIZONTAL
PORTING	SAE#

DESIGNED_BY KMC APPROVAL_BY *** APPROVAL DATE. 2017/06/29

UNIT:[inch]mm REFER TO

CUSTOMER 16DA010H212A Material number 010101-0113 SCALE

HYDRAULIC POWER UNIT

16D01-009 REVISION B PAGES /