

1 2 3 4 5



<<<< CUSTOMER APPROVAL >>>>

THIS DRAWING IS BEING SUBMITTED FOR YOUR APPROVAL OF THIS DESIGN ON YOUR APPLICATION AND REQUIRMENTS.

A SIGNATURE IS REQUIRED BEFORE AN ORDER CAN BE PROCESSED.

APPROVED BY _____ APPROVAL DATE _____/_____/_____



REV	DESCRIPTION	DATE	SIGNATURE	CHECKED
XXX	XXX	00/00/00	XXX	XXX

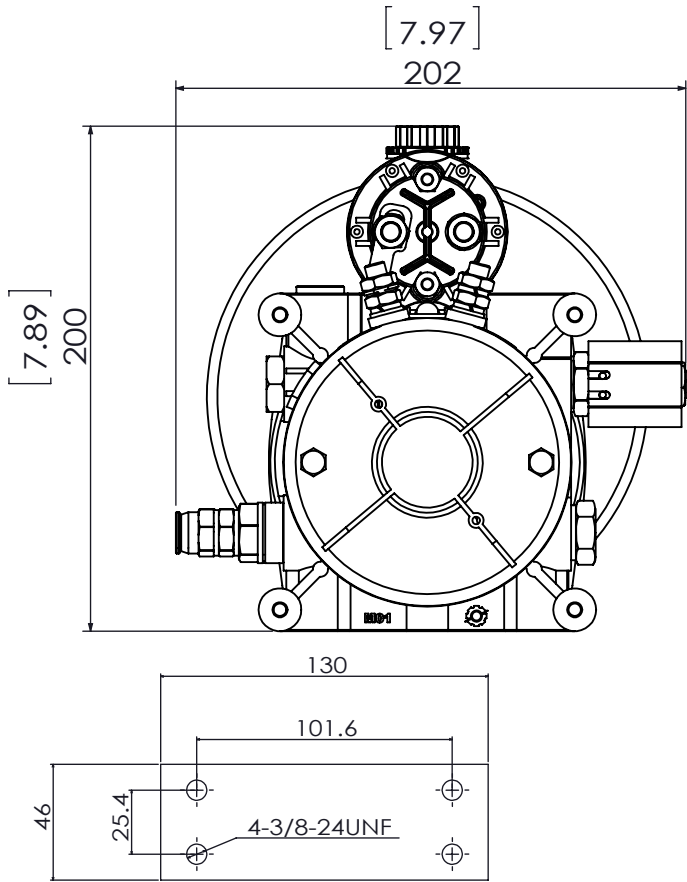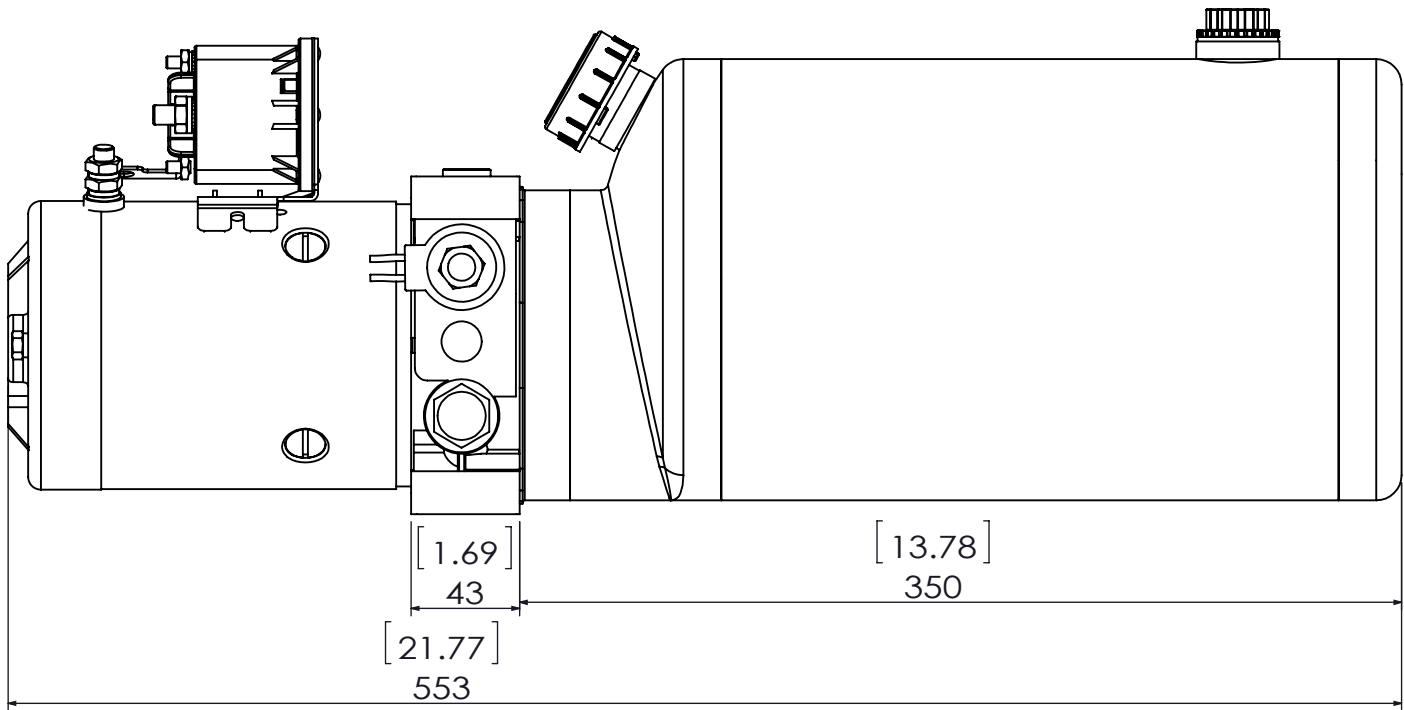

Network 标签

MODEL	16DA030H212A		
Relief Valve Setting	2500PSI		
Motor(KW)	1.6KW	Voltage	12V
Pump Disp	2.1ML	Flow	5.2LPM
Tank Usable	5.7L	Litres	

SPECIFICATIONS	
ELECTRICAL MOTOR	416A-2P-M,DC12V,1.6KW
FLOW RATE	5.2LPM@1500PSI
MAX. PRESSURE	3000PSI
RELIEF SETTING	2500PSI
GEAR PUMP DISP.	G210T,2.1ML/REV
RESERVOIR	LS2,STEEL,1.5GAL
REMOTE CONTROL	N/A
MOUNTING	VERTICAL OR HORIZONTAL
PORTING	SAE6#

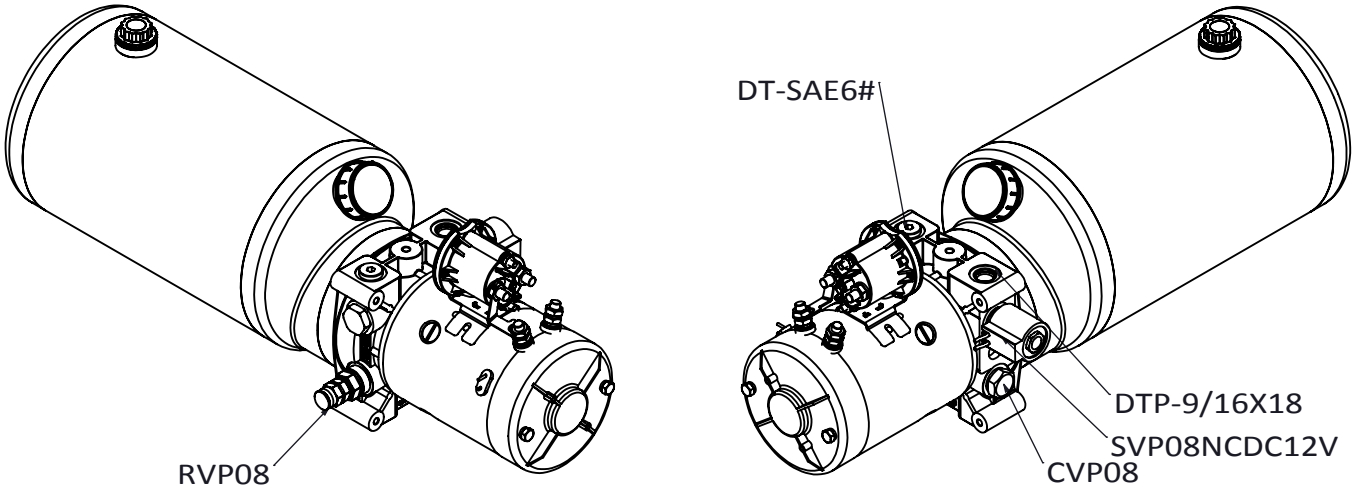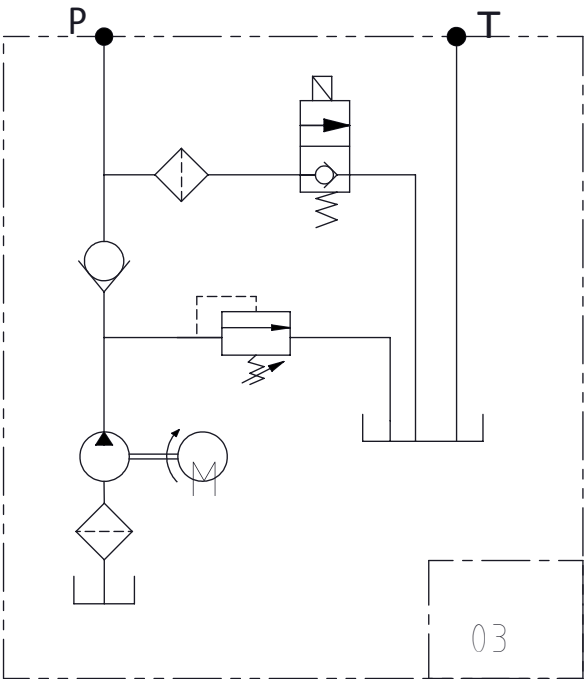

DESIGNED BY KMC	CHECKED BY X	APPROVAL DATE. 2017/6/2
REFER TO		
CUSTOMER 16DA030H212A	Material number 010101-0106	SCALE 1:3
HYDRAULIC POWER UNIT		
16D03-023		REVISION G
		SHEET 1:3